




5 Years Warranty

## 5566 High altitude lighting fixtures

Suitable for high-rise buildings, modern production lines, logistics warehouses, and modern workplaces  
LUMILEDS LED, Philips driver and high-brightness Darkoo Lens


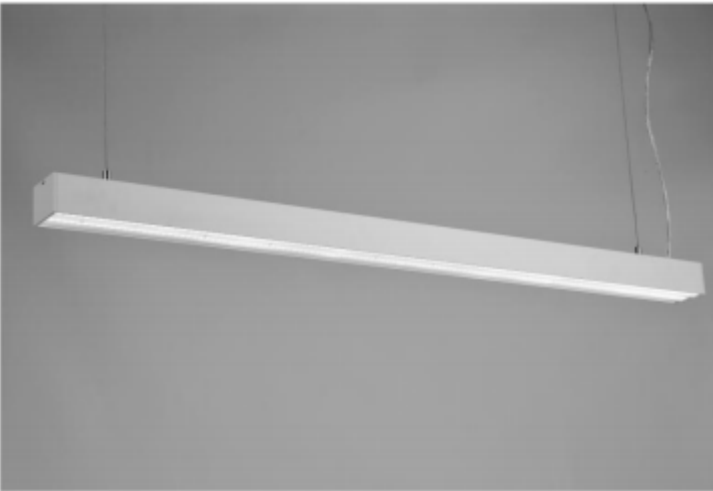


# 5566 High altitude lighting fixtures



LUMILEDS Leds, Philips Driver

Model No.: F5566-L4  
 Size: 1150\*66\*55mm/2300\*66\*55mm  
 CCT: 4000K/5000K/6000K CRI>85 UGR<22  
 Color: Sand Black/Sand White/Customize  
 Input Voltage: 220V  
 Installation: Pendant

## Parameter Option: Triac/0-10V/Dali Tuya



Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*66*55	40W	38	1585	<16




Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*66*55	40W	115	4836	<22

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
2300*66*55	80W	115	9672	<22



Dual polarization 28° Single polarization 18°

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*66*55	40W	105	4308	<22



**5566** High-altitude lighting fixtures

Equipped with LUMILEDS light source and PHILIPS power supply

Warranty **5-year**





**5566** High-altitude lighting fixtures

Equipped with LUMILEDS light source and PHILIPS power supply


Warranty **5**-year

# 5566 Office lighting

\* The light efficiency is too high, and a cellular network should be added for office use to increase anti-glare

Equipped with LUMILEDS light source and PHILIPS power supply

Warranty 5-year

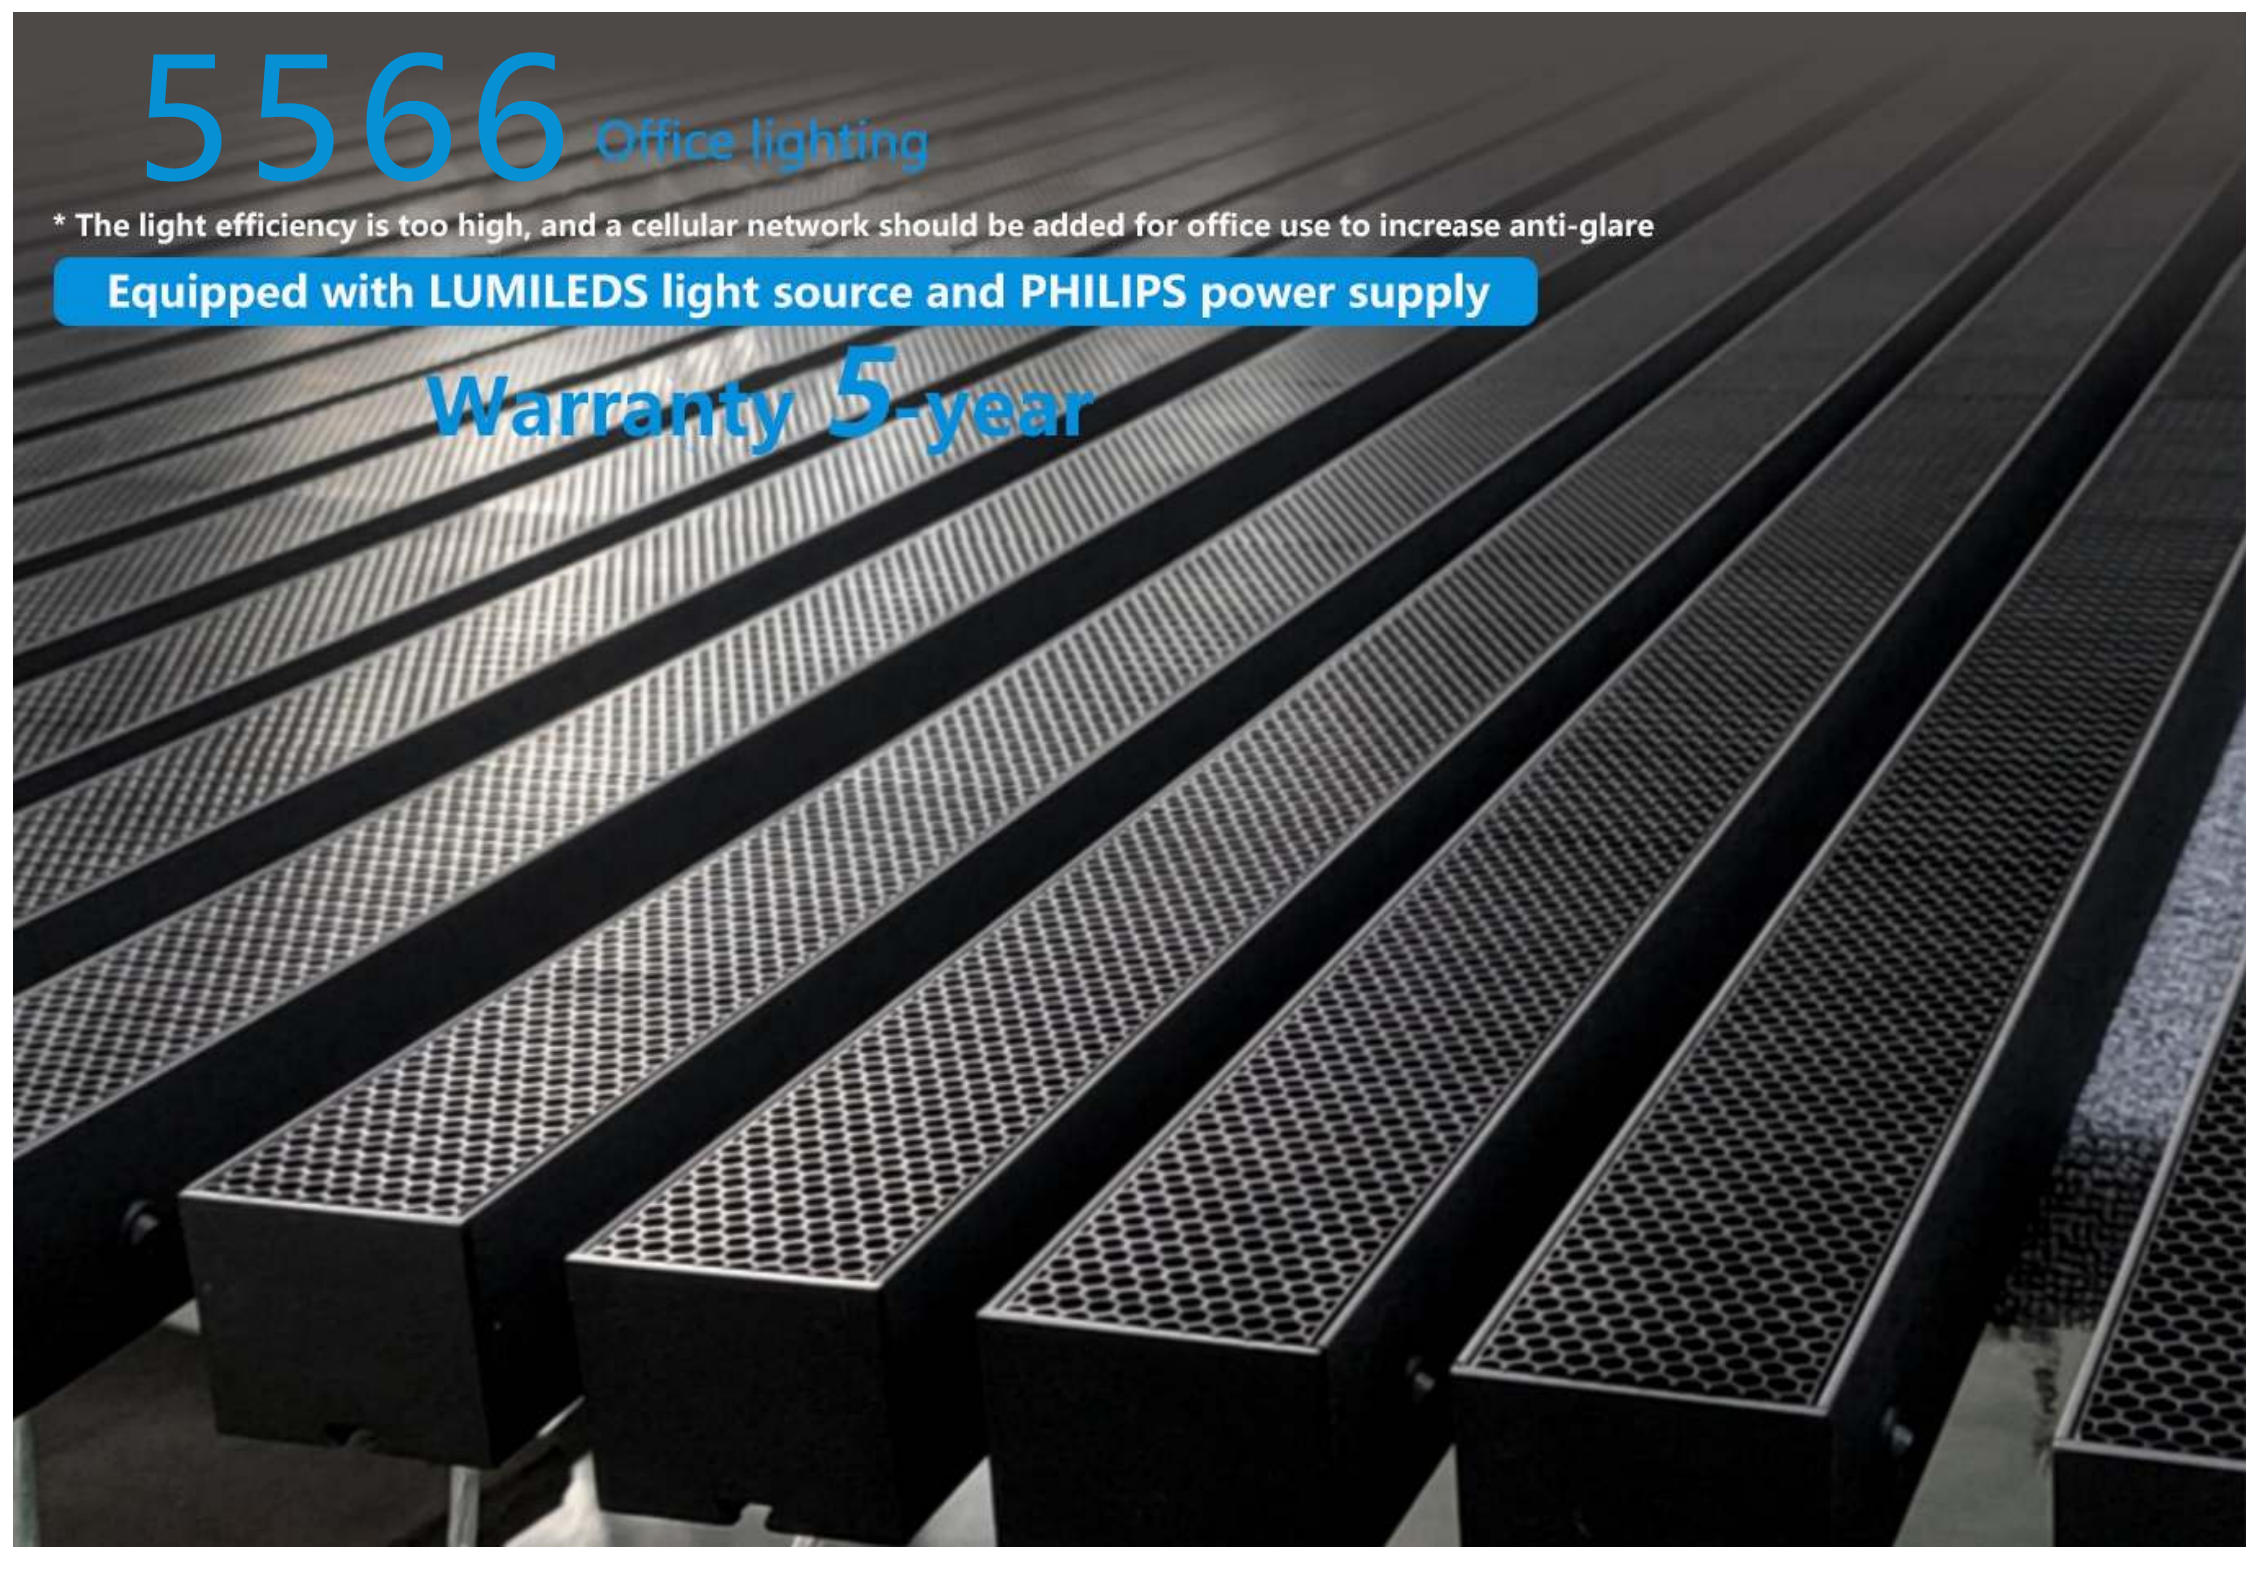



# 5070

Office lighting selection

3 consecutive years of best-selling


**Cellular network anti-glare**

Upgrade slow start

Light and intelligent to protect eyes

Cellular network anti-glare



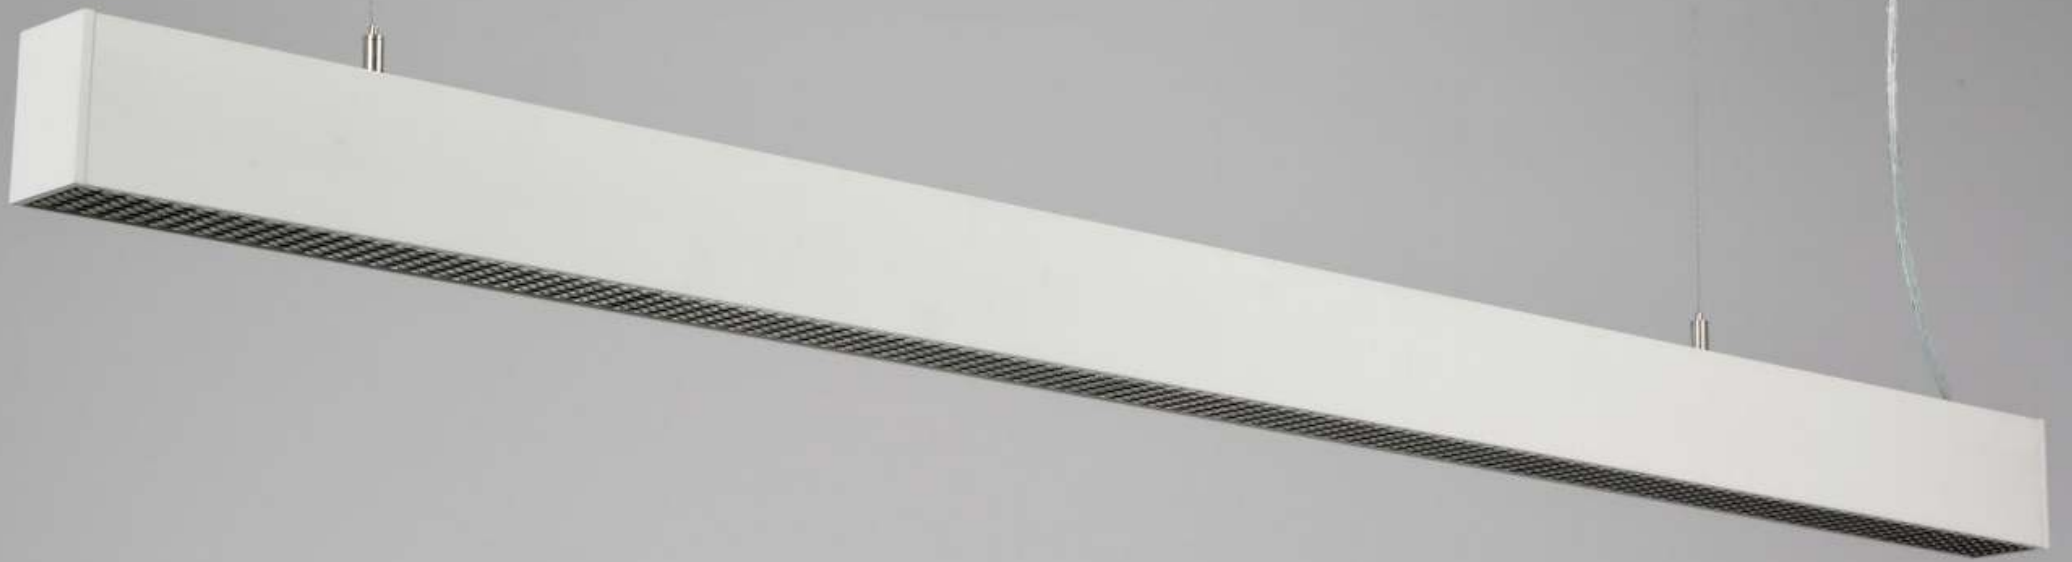

**5070**

Office lighting selection

Slow start, light intelligence, eye protection

Cellular network anti-glare



# 5070 Office lighting selection

Slow start, light intelligence, eye protection

Product model: F5070-PCW 1200  
 Product specifications: 1200\*50\*70 (mm)  
 2400\*50\*70 (mm)

Color temperature: 3000K/4000K/6000 CRI>90 UGR<16  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V slow start function  
 Installation: hanging (can be equipped with a ceiling plate)

Product parameters Customizable: 1-10V DALI SCR intelligent dimming and other functions






## F5070-PCW 1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*50*70	36W	41	1512	<16

## F5070-PCW 2400

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
2400*50*70	72W	41	3025	<16

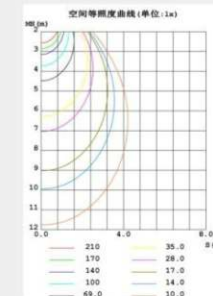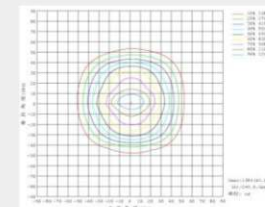





**5070**

Office lighting selection

Slow start, light intelligence, eye protection

Rhombocrystal PC mask,  
high light efficiency/good anti-glare

# 5070 Office lighting selection

Slow start, light intelligence, eye protection

Product model: F5070-PCL 1200  
 Product specifications: 1200\*50\*70 (mm)  
 2400\*50\*70 (mm)  
 Color temperature: 3000K/4000K/5700 CRI>85 UGR<20  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V slow start function  
 Installation: hanging (can be equipped with a ceiling plate)







Product parameters Customizable: 1-10V DALI SCR intelligent dimming and other functions

## F5070-PCL 1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*50*70	36W	83	2950	<20

## F5070-PCL 2400

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
2400*50*70	72W	83	5900	<20

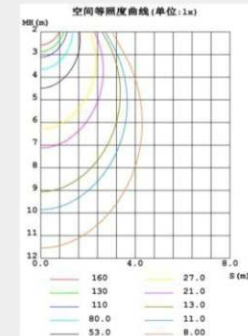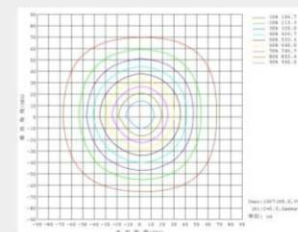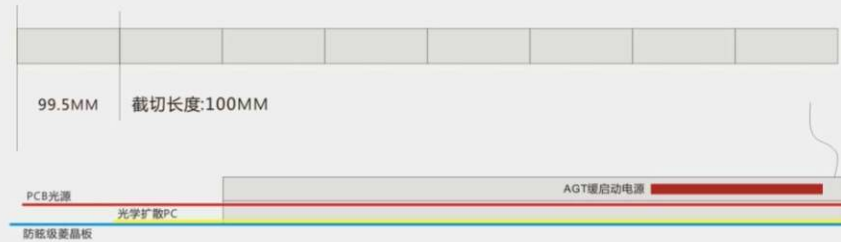

# Engineering model 5070 customized application












Equipped with LUMILEDS light source and PHILIPS power supply

## 5070 Office lighting selection

warranty **5**-year

1195<sub>MM</sub> ±1

### Multi-function application Linear light

5070-PC	Floodlight PC (PC 25M/roll)	
5070-PCL	Anti-glare grade Rhombocrystal PC	
5070-PCW	Honeycomb anti-glare net	
5070-X6-AP3	Spotlight module	
5070-X6-L3	Spotlight module	
5070-X6-L5	Spotlight module	
5070-X6-AP5	Spotlight module	
5070-X6-AP5-1	Spotlight module	
5070-AT2	Track spotlight	
5070-T2	Track module	
5070-P8	Polarized module	

### Installation


/Suction Type /Hanging Wire Ceiling installation & hanging wire installation

### Optical angle

15° 30° 45° [90°] P8 : 80\*100 -20°

### Power brand/certification

Lighting equipped with power supply slow start function/high P without flicker CE/CC/ENEC/RCM

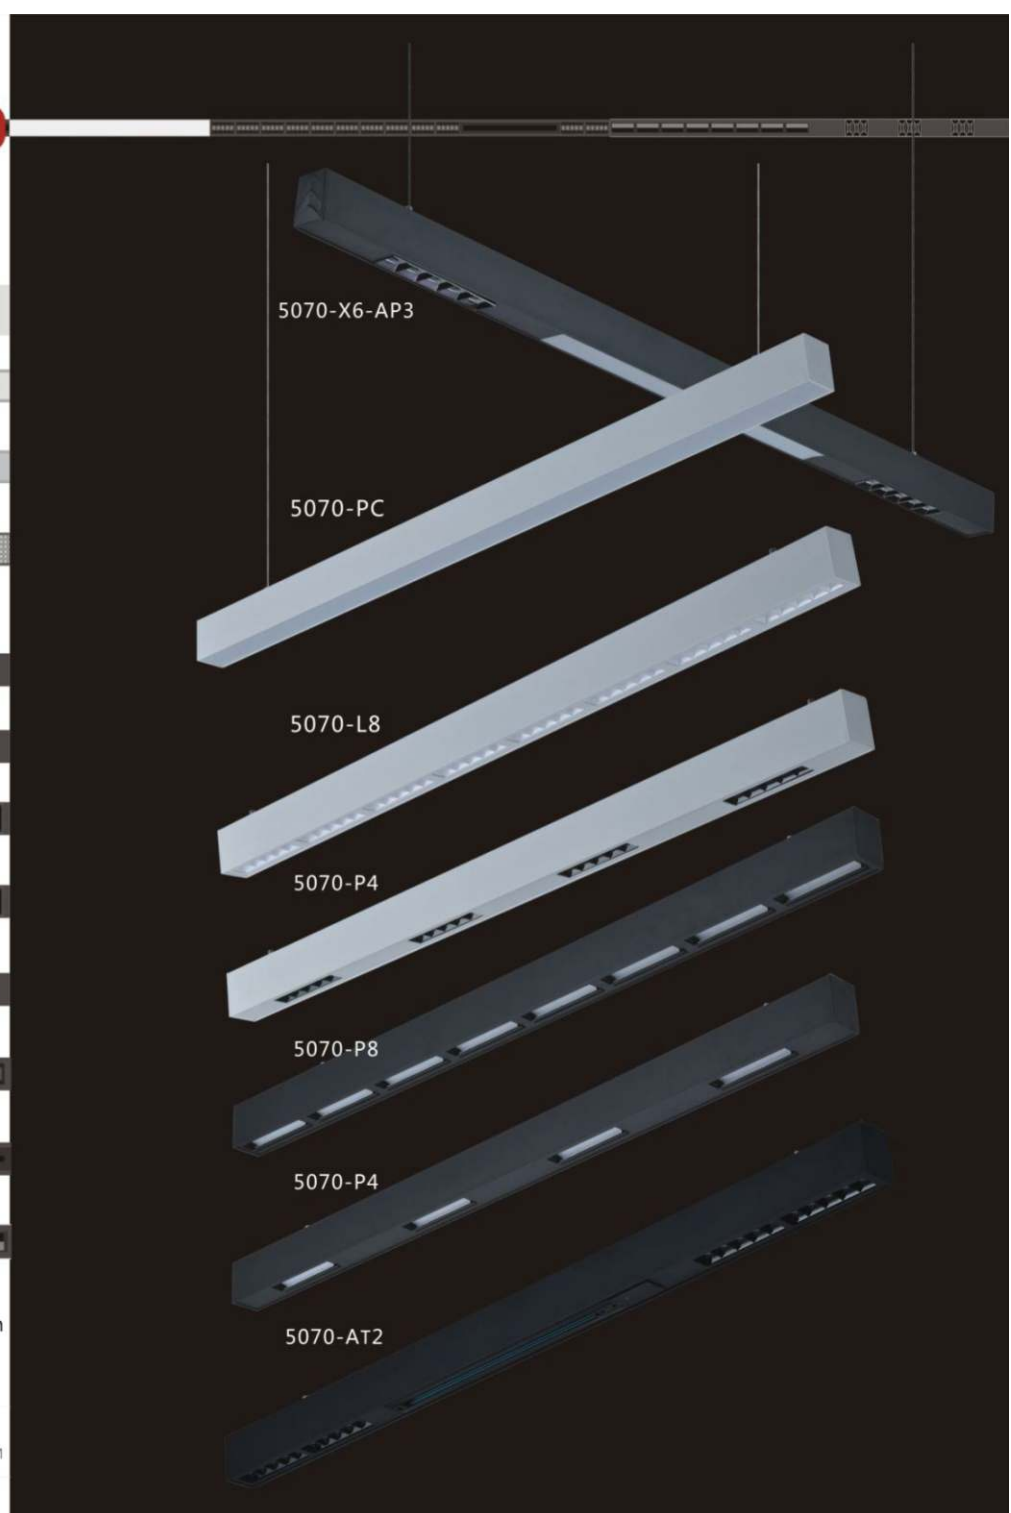





Professional linear office lighting customization



## Engineering model 5070 customized application

Equipped with LUMILEDS light source PHILIPS power supply

Warranty **5** Years

Rolled PC mask 25M/roll





# 4375

More suitable for office, tea table, bar

Slow start, light intelligence, eye protection

# 4375

More suitable for office, tea table, bar

Slow start, light intelligence, eye protection

Product model:	F4375
Product specifications:	1200*43*75 (mm) 2400*43*75 (mm)
Color temperature:	3000K/4000K/5700 CRI>95 UGR<19
Color:	sand black sand white/other colors can be customized
Input voltage:	220V slow start function
Installation:	hanging (Installation method of hanging wire and hanging rod)

## Product parameters

F4375-L9 -R				
Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*43*75	36W	83.48	3580	<19
132.5mm	Cut length:132.5mm		1193mm	



F4375-PC				
Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*43*75	35W	67.2	2980	<22
99.5mm	Cut length:100mm		1195mm	


F4375-AP2				
Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*43*75	36W	79	2880	<22

F4375-L4				
Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*43*75	20W	81	1570	<22



Designers can choose to include honeycomb mesh to increase anti-glare, but the light effect will be relatively reduced!



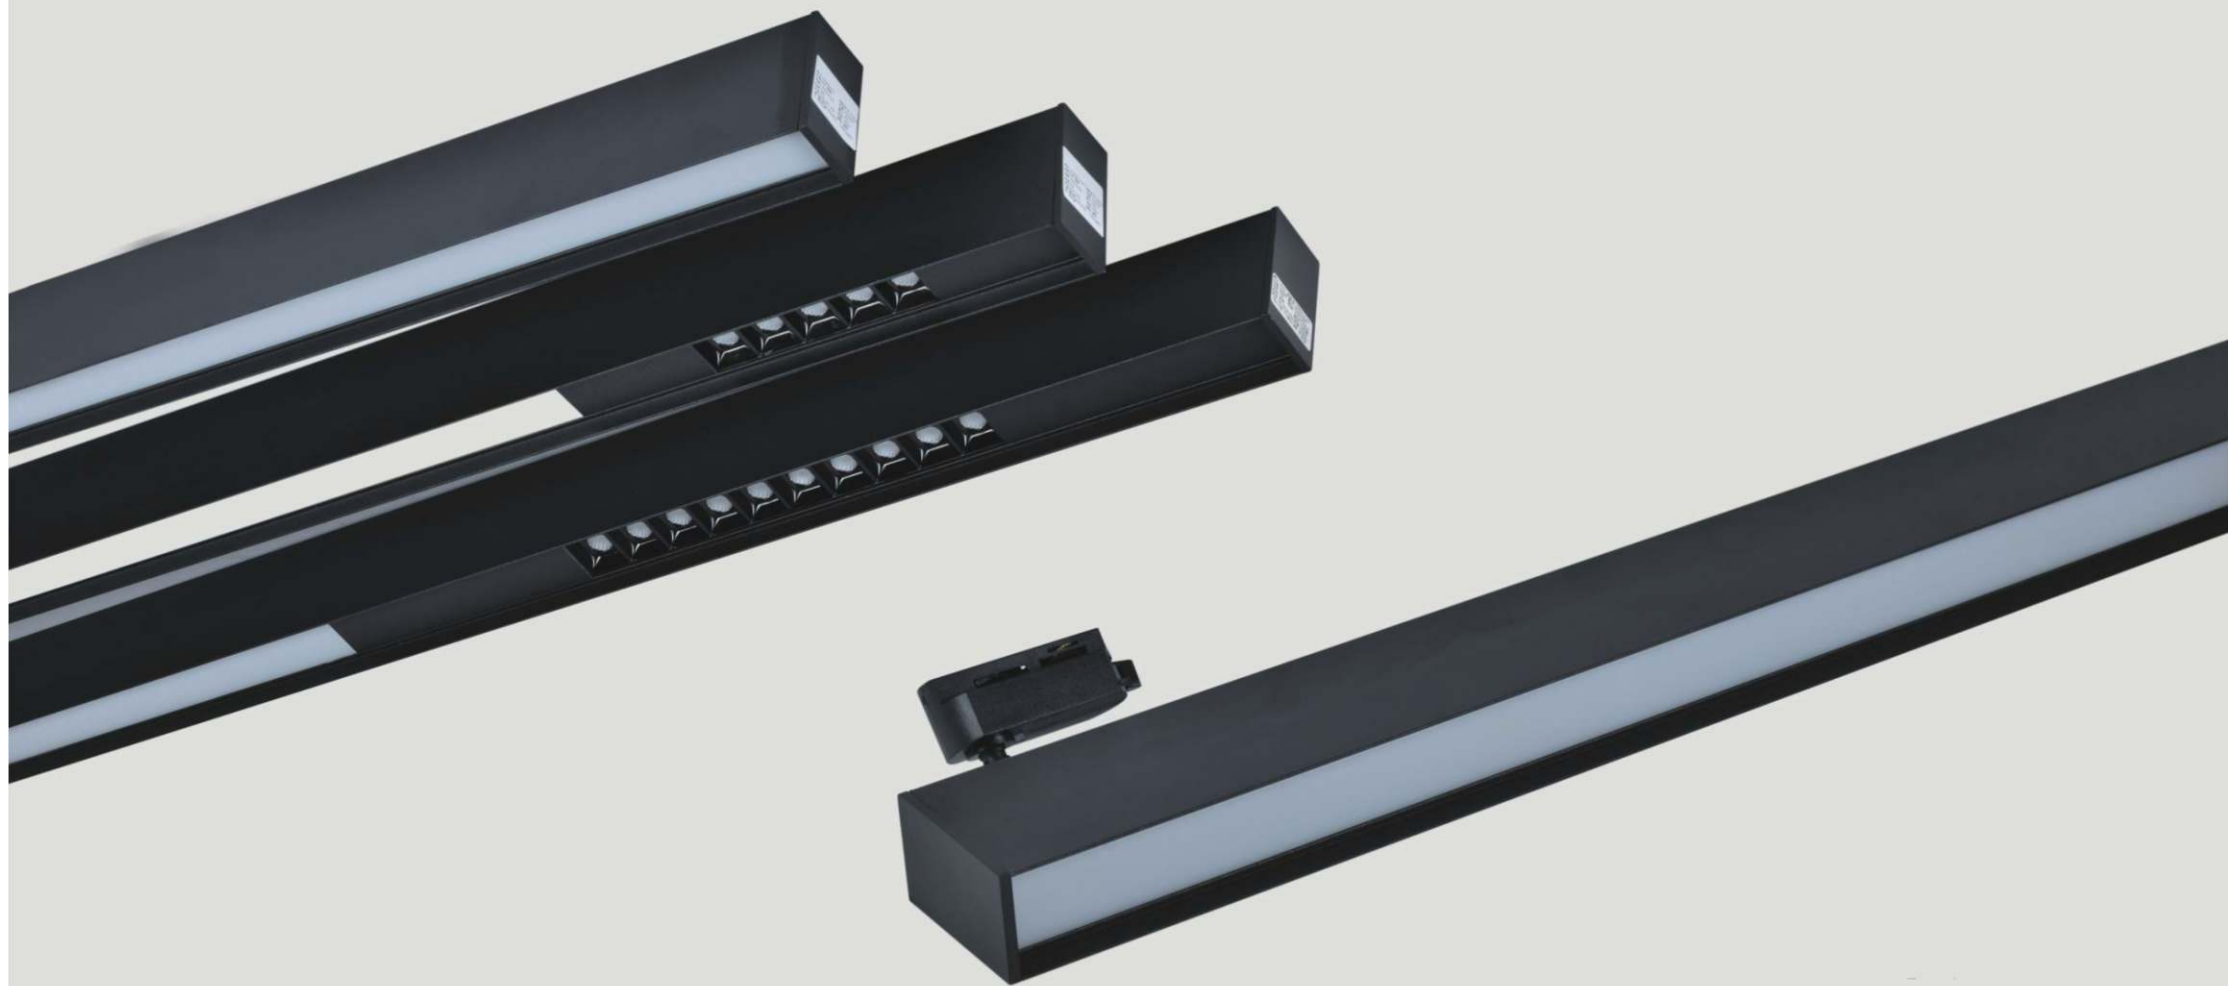

## Engineering custom model

# 4375

More suitable for office, tea table, bar

Slow start, light intelligence, eye protection





# 4375

Ceiling installation, square installation  
suitable for hand grille ceiling or aisle lighting applications

Engineering customization

Custom

ZK4375-A1 Spotlight module		L143 (mm)
ZK4375-A2 Spotlight module		L275 (mm)
ZK4375-A3 Spotlight module		L408 (mm)
ZK4375-L4 Spotlight module		L540 (mm)
ZK4375-L7 Spotlight module		L938 (mm)
ZK4375-L8 Spotlight module		

Slow start, light intelligence, deep anti-glare, protect eyes

Product model: ZK4375  
 Product specifications: 143\*43\*75 (mm) 275\*43\*75 (mm) 408\*43\*75 (mm) 540\*43\*75 (mm) 938\*43\*75 (mm) 1060\*43\*75 (mm)  
 Color temperature: 3000K/4000K/5700 CRI>95 UGR<19  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V  
 Installation: Ceiling installation

## Product parameters

4375-A1	4375-A2	4375-A3	4375-A4	4375-A7	4375-A7				
Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR	Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
143*43*75	5W	83.48	410	<19	275*43*75	10W	83.48	810	<19
					408*43*75	15W	83.48	1220	<19
					540*43*75	20W	83.48	1660	<19
					938*43*75	30W	83.48	2590	<19
					1060*43*75	35W	83.48	3460	<19



Product model: F4375  
Product specifications: 1200\*43\*75 (mm)  
2400\*43\*75 (mm)  
Color temperature: 3000K/4000K/5700 CRI>95 UGR<19  
Color: sand black sand white/other colors can be customized  
Input voltage: 220V slow start function  
Installation: Hoisting (hanging wire and hanging rod installation method)

# 4375

More suitable for office, tea table, bar

Slow start, light intelligence, eye protection



4085 — UGR < 16 —  
Latest style anti-glare grille

Slow start light intelligent eye protection

Using LUMILEDS 0.5W high brightness light source

**+2022 NEW**  
Export best-selling model



Equipped with black grille, more anti-glare!

**4085** ——— UGR < 16 ———  
Latest style anti-glare grille

**Slow start light intelligent eye protection**

Using LUMILEDS 0.5W high brightness light source

**+2022 NEW**  
Export best-selling model




Equipped with white grille, higher light efficiency!

**4085** UGR < 16  
Latest style anti-glare grille

**Slow start light intelligent eye protection**

Using LUMILEDS 0.5W high brightness light source

**+2022 NEW**  
Export best-selling model

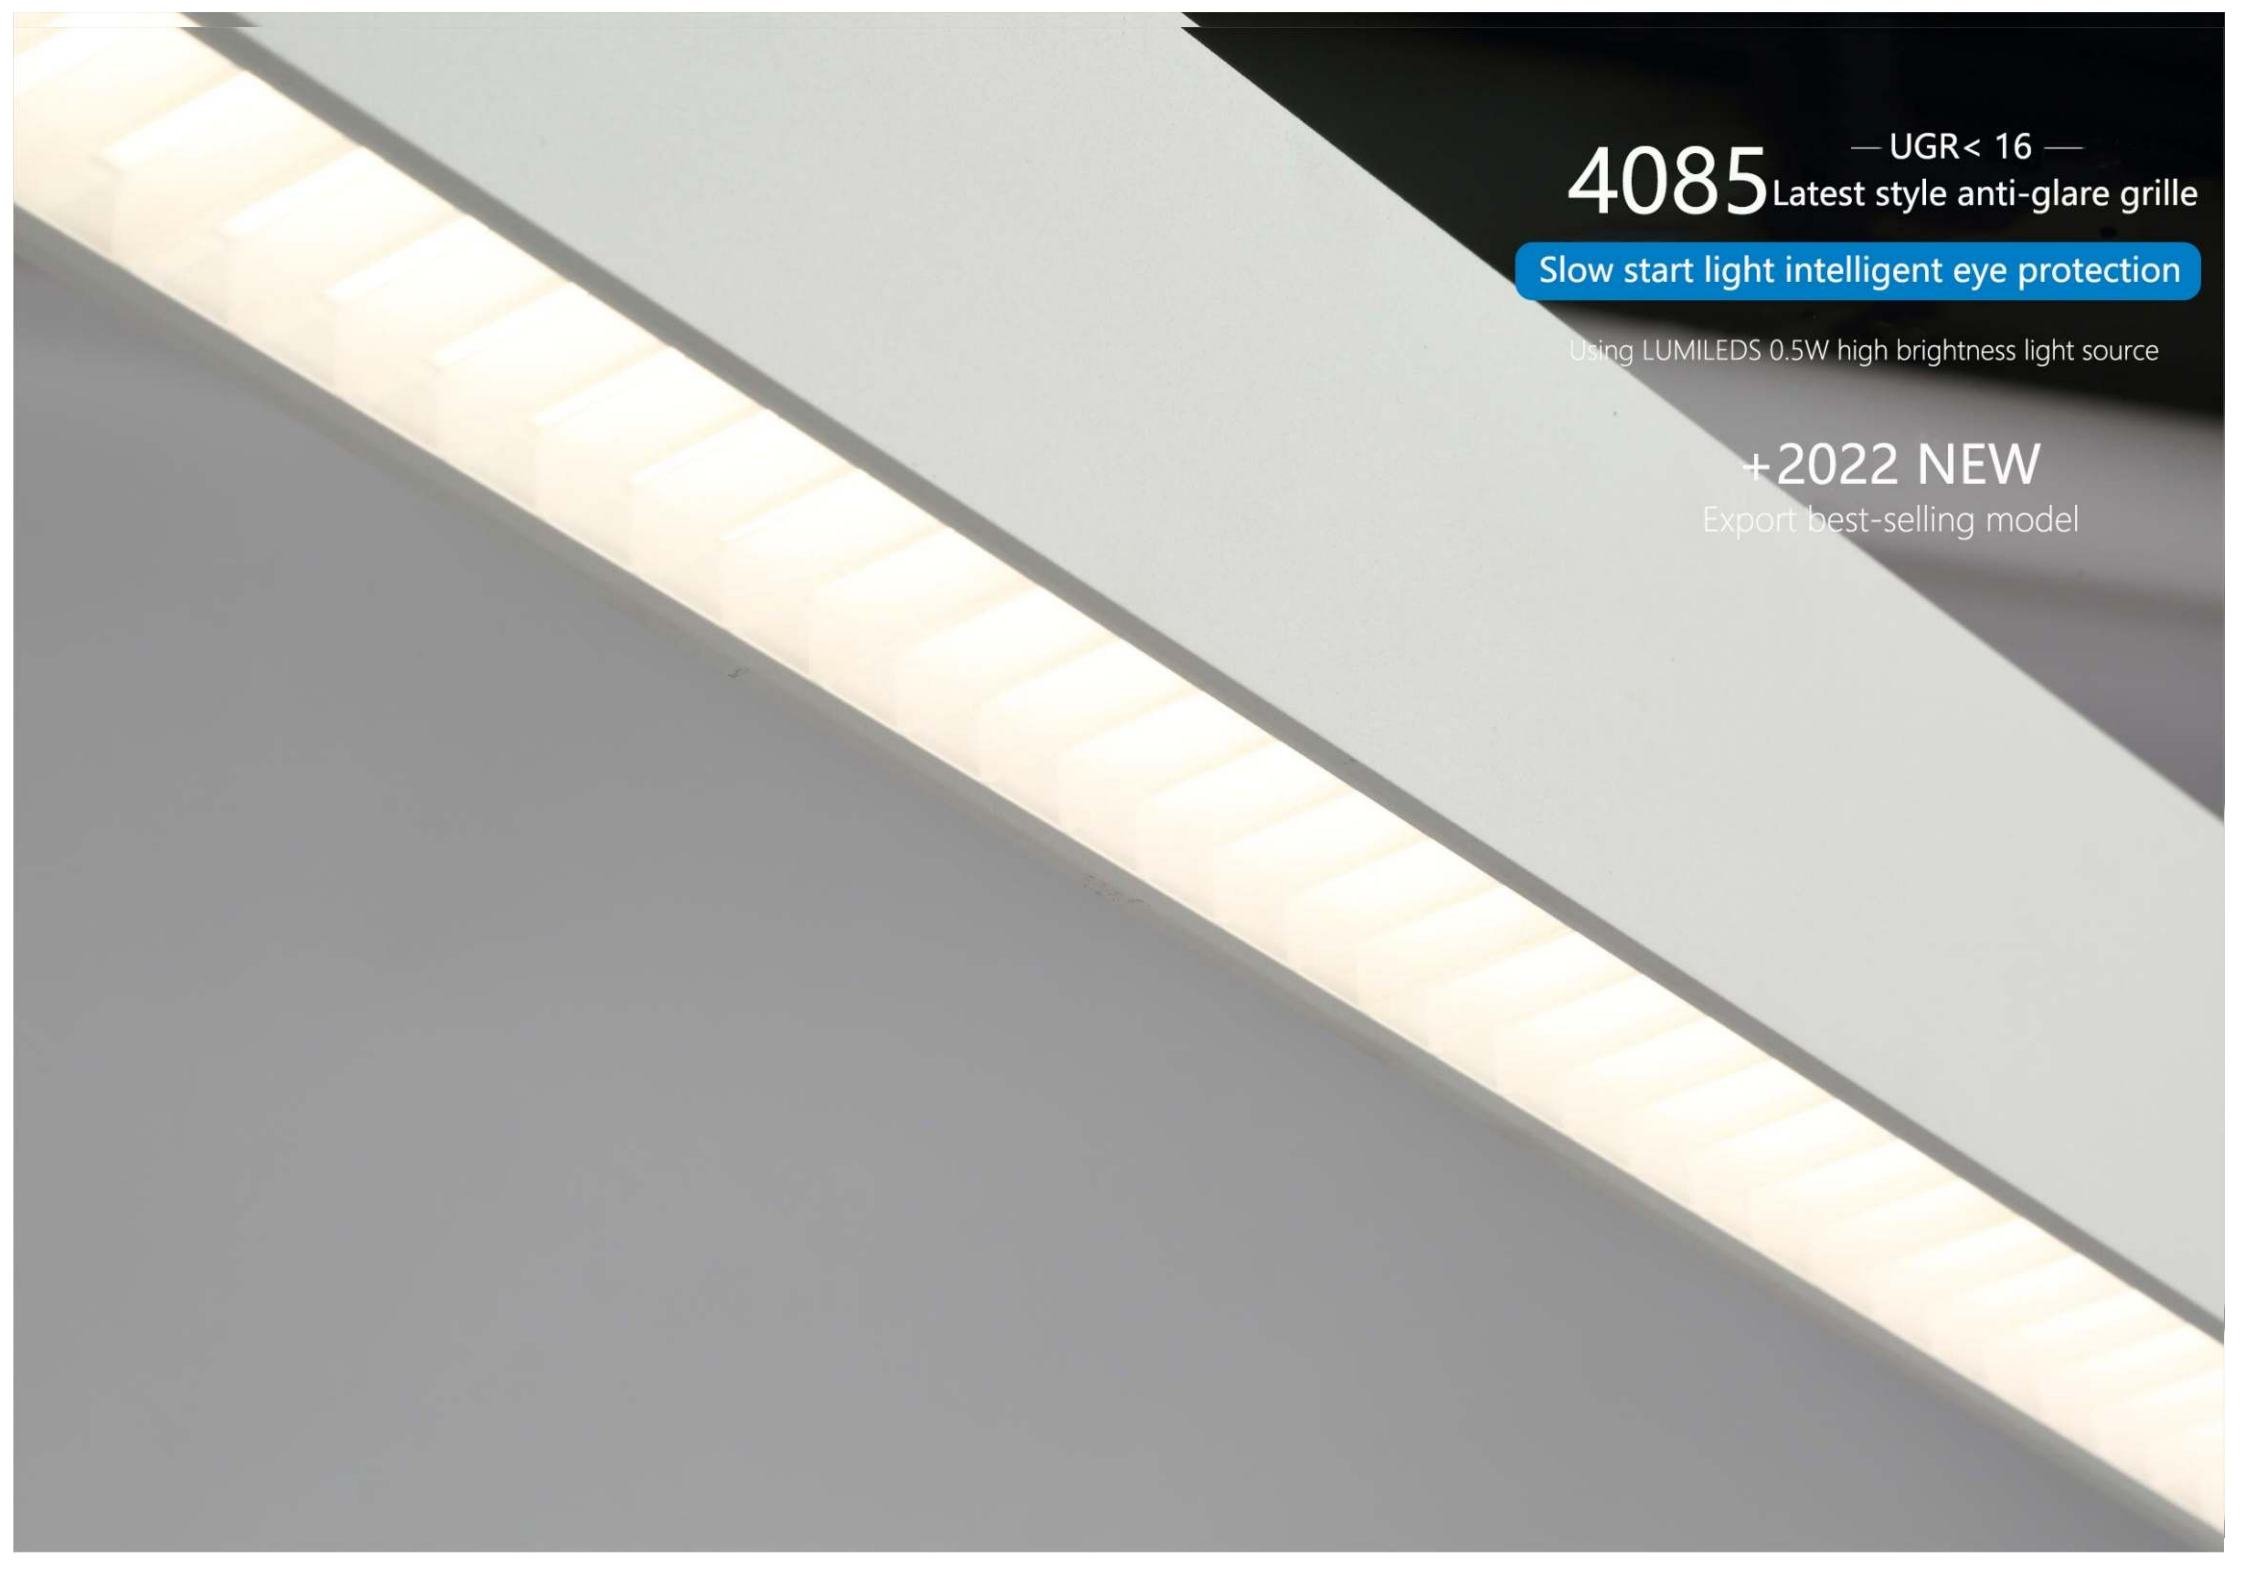


4085 — UGR < 16 —  
Latest style anti-glare grille

Slow start light intelligent eye protection

Using LUMILEDS 0.5W high brightness light source

+2022 NEW  
Export best-selling model

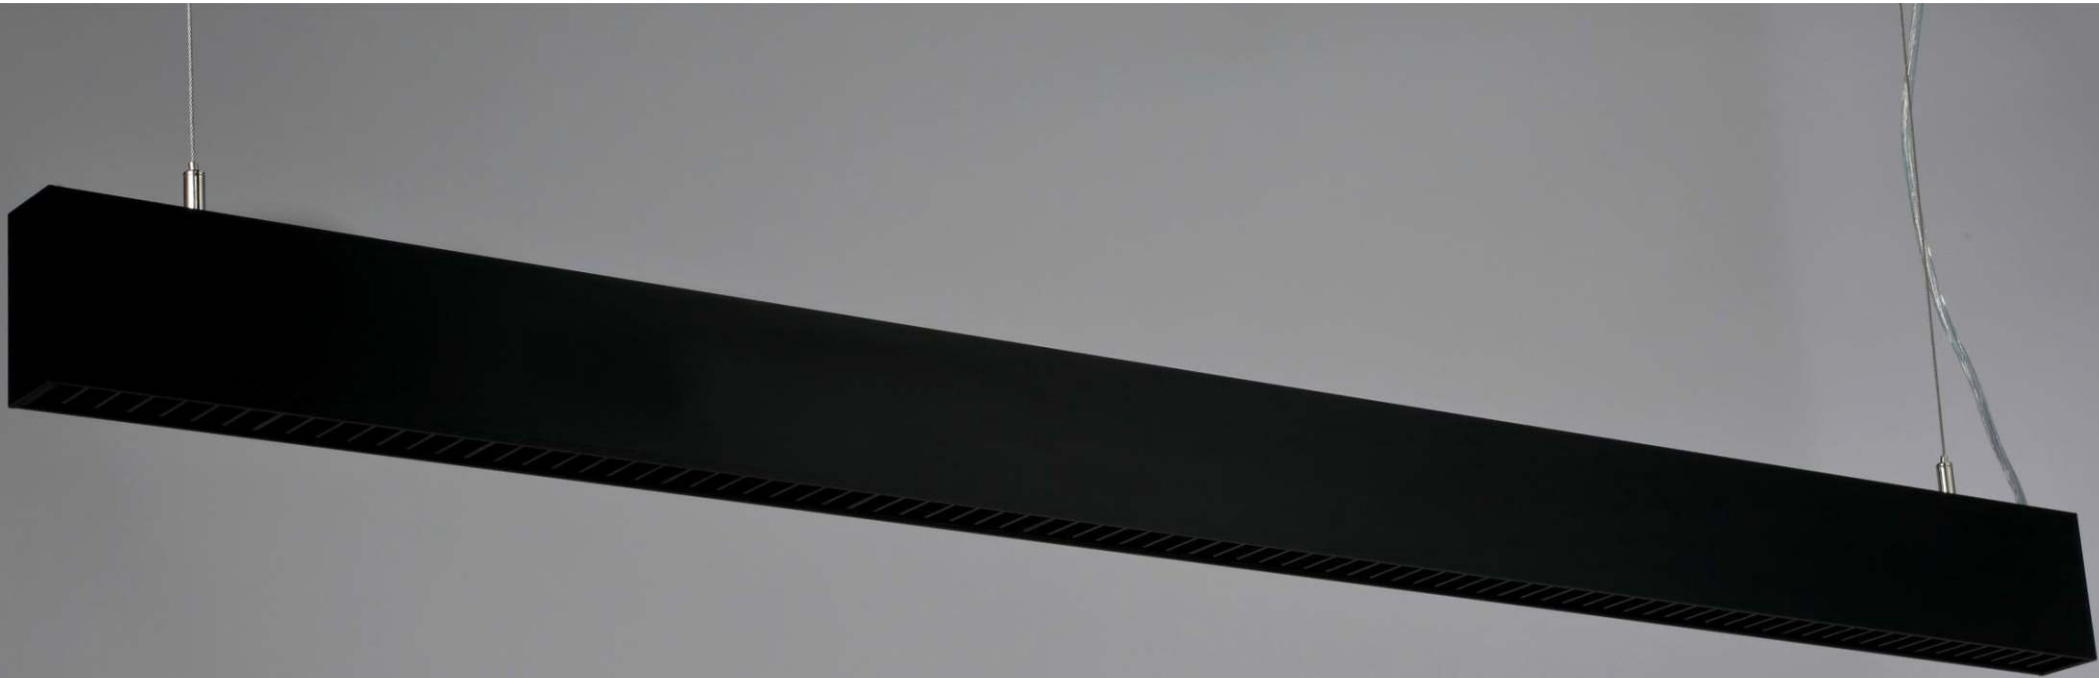

## Two styles of single down light and up and down light

Flexible matching, other lamp body colors can be customized

**4085** — UGR < 16 —  
Latest style anti-glare grille

Slow start light intelligent eye protection

Using LUMILEDS 0.5W high brightness light source

**+2022 NEW**  
Export best-selling model





# 4085 — UGR < 16 —

## Latest style anti-glare grille

**Slow start light intelligent eye protection**

Using LUMILEDS 0.5W high brightness light source

- Product model: F4085
- Product specifications: 1205\*40\*85 (mm)  
2410\*40\*85 (mm)
- Color temperature: 3000K/4000K/5700 CRI>95 UGR<16
- Color: sand black sand white/other colors can be customized
- Input voltage: 220V slow start function
- Installation: Hoisting (ceiling cup can be equipped separately)

**Product parameters Customizable: 1-10V DALI SCR intelligent dimming and other functions**






### F4085-D-1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1205*40*85	36W	51	1893	<16

### F4085-D-2400

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
2410*40*85	72W	51	3565	<16

\*One cut per 100MM

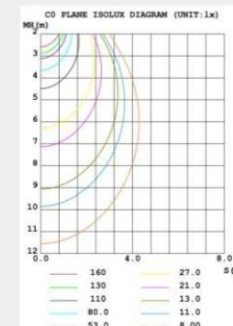



+2022 NEW  
Export best-selling model



4085 Latest style anti-glare grille  
Using LUMILEDS 0.5W high brightness light source  
—UGR < 16—



Ordinary switch three-speed control lamp

1 Single open downlight 2 Single open uplight 3 Up and down at the same time



Single downlight and up and down light two styles,  
can be customized according to the scene application!



# 4085 — UGR < 16 —

Latest style anti-glare grille



Up and down light style

Ordinary switch three-speed control lamp

Using LUMILEDS 0.5W high-brightness light so

- ① Single open downlight
- ② Single open uplight
- ③ Up and down at the same time

Product model: F4085  
 Product specifications: 1205\*40\* 85 (mm)  
 2410\*40\*85 (mm)  
 Color temperature: 3000K/4000K/5700 CRI>95 UGR<16  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V Includes three-stage control switch control  
 Installation: Hoisting (ceiling cup can be equipped separately)

Product parameters can be customized: 1-10V DALI thyristor intelligent dimming and other functions, but there is no three-speed control function.



## F4085-DL-1200


Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1205*40*85	36W	50	1493	<16

## F4085-DL-2400



Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
2410*40*85	72W	50	3505	<16




\*One cut per 100MM

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



CO PLANE ISOLUX DIAGRAM (UNIT: lx)

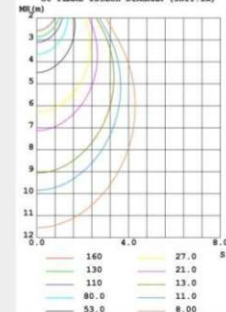

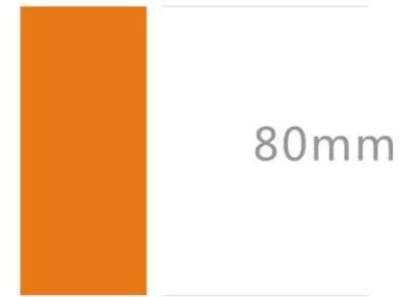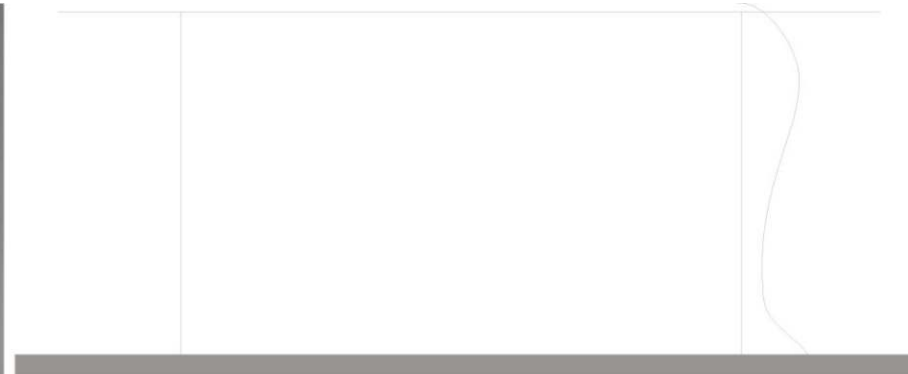

3580



Ordinary switch three-speed control lamp

- ① Single open downlight   ② Single open uplight   ③ Up and down at the same time



3580

Unique single down light anti-glare effect

— UGR < 16 —

Slow start, light intelligence, eye protection



# 3580

Slow start, light intelligence, eye protection

Environmental floodlighting, in addition to office lighting, is also used in aisles, corridors, shopping malls, specialty stores and other places.

Up and down light hanging line office lamp tea table lamp bar table lamp

# 3580

— UGR < 16 —

Slow start, light intelligence, eye protection

3580 single down light office line light

# 3580

— UGR < 16 —



Ordinary switch three-speed control lamp

- 1 Single open downlight
- 2 Single open uplight
- 3 Up and down at the same time





# 3580

UGR<16

Up and down light office line lights



Ordinary switch three-speed control lamp

1 Single open downlight


3 Up and down at the same time

2 Single open uplight

Product model: F3580  
 Product specifications: 1200\*35\* 80 (mm)  
 2400\*35\*80 (mm)

Color temperature: 3000K/4000K/5700 CRI>95 UGR<16  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V Includes three-stage control switch control  
 Installation: Hoisting (ceiling cup can be equipped separately)

**Product parameters**  
 can be customized: 0-10 DALI thyristor Ziqbee and other intelligent dimming control

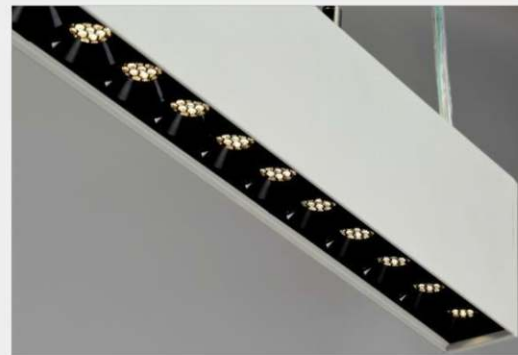

### F3580-L9-1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*35*80	36W	83	3420	<16



### F3580-PC-1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*35*80	36W	75	2660	<22




### F3580-AP2-1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*35*80	36W	73	2628	<16



### F3580-L4-1200

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*35*80	20W	85.3	1700	<16

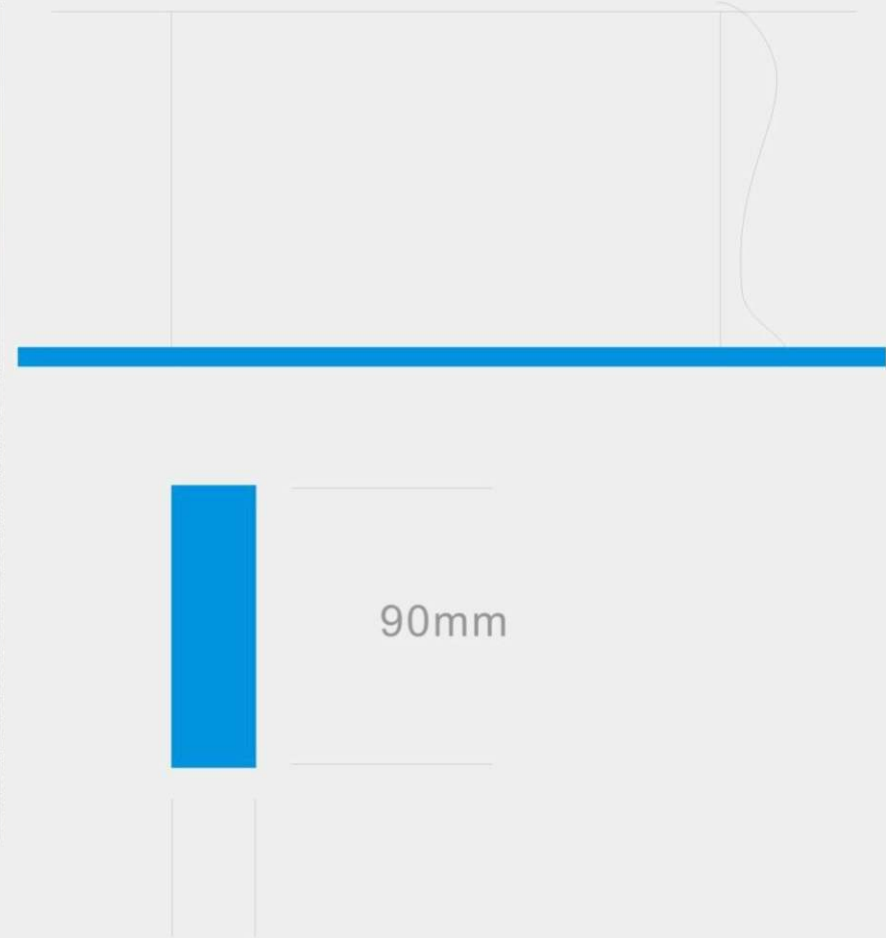

2790

UGR<16



Ordinary switch three-speed control lamp 27mm

- ① Single open downlight   ② Single open uplight   ③ Up and down at the same time

Narrow mierl type up and down light line lights

Applicable to office lights tea table lamps bar table lamps



Narrow miter type up and down light line lights

2790



Ordinary switch three-speed control lamp

1 Single open downlight 2 Single open uplight 3 Up and down at the same time



Applicable to office lights, tea table lamps, bar table lamps



# 2790

Slow start, light and intelligent, eye protection

— UGR<16 —

## Narrow Mierl type down light line lights


Applicable to office lights, tea table lamps, bar table lamps

# 2790



Ordinary switch three-speed control lamp

- 1 Single open downlight
- 2 Single open uplight
- 3 Up and down at the same time

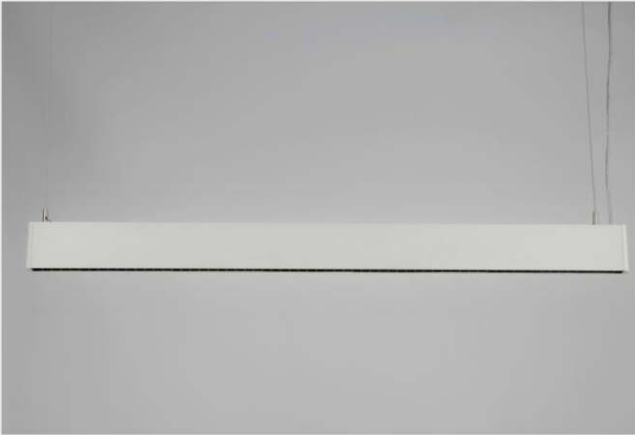


Product model: F2790  
 Product specifications: 1150\*27\*90 (mm)  
 2300\*27\*90 (mm)

Color temperature: 3000K/4000K/5000K CRI>95 UGR<16  
 Color: sand black sand white/other colors can be customized  
 Input voltage: 220V up and down light models are equipped with three-stage sub-switch control, and single down light models are equipped with slow start function.  
 Installation: hanging (ceiling plate can be equipped separately)




## Product parameters

Customizable: 0-10 DALI thyristor Zigbee and other intelligent dimming control





### F2790-L14

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*27*90	36W	75	2710	<16




### F2790-PC

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*27*90	36W	85	2890	<22

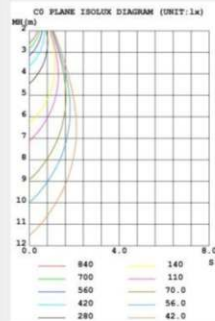

### F2790-AP3

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*27*90	36W	80	2670	<22



### F2790-L6-3

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*27*90	36W	80	2670	<22

# 2560

Slow start light intelligent eye protection

— UGR < 16 —

Narrow Mierl type down light line lights

Applicable to office lights,  
tea table lamps,  
bar table lamps






2560

Slow start light intelligent eye protection

— UGR < 16 —


Narrow Mierl type down light line lights

Applicable to office lights, tea table lamps, bar table lamps


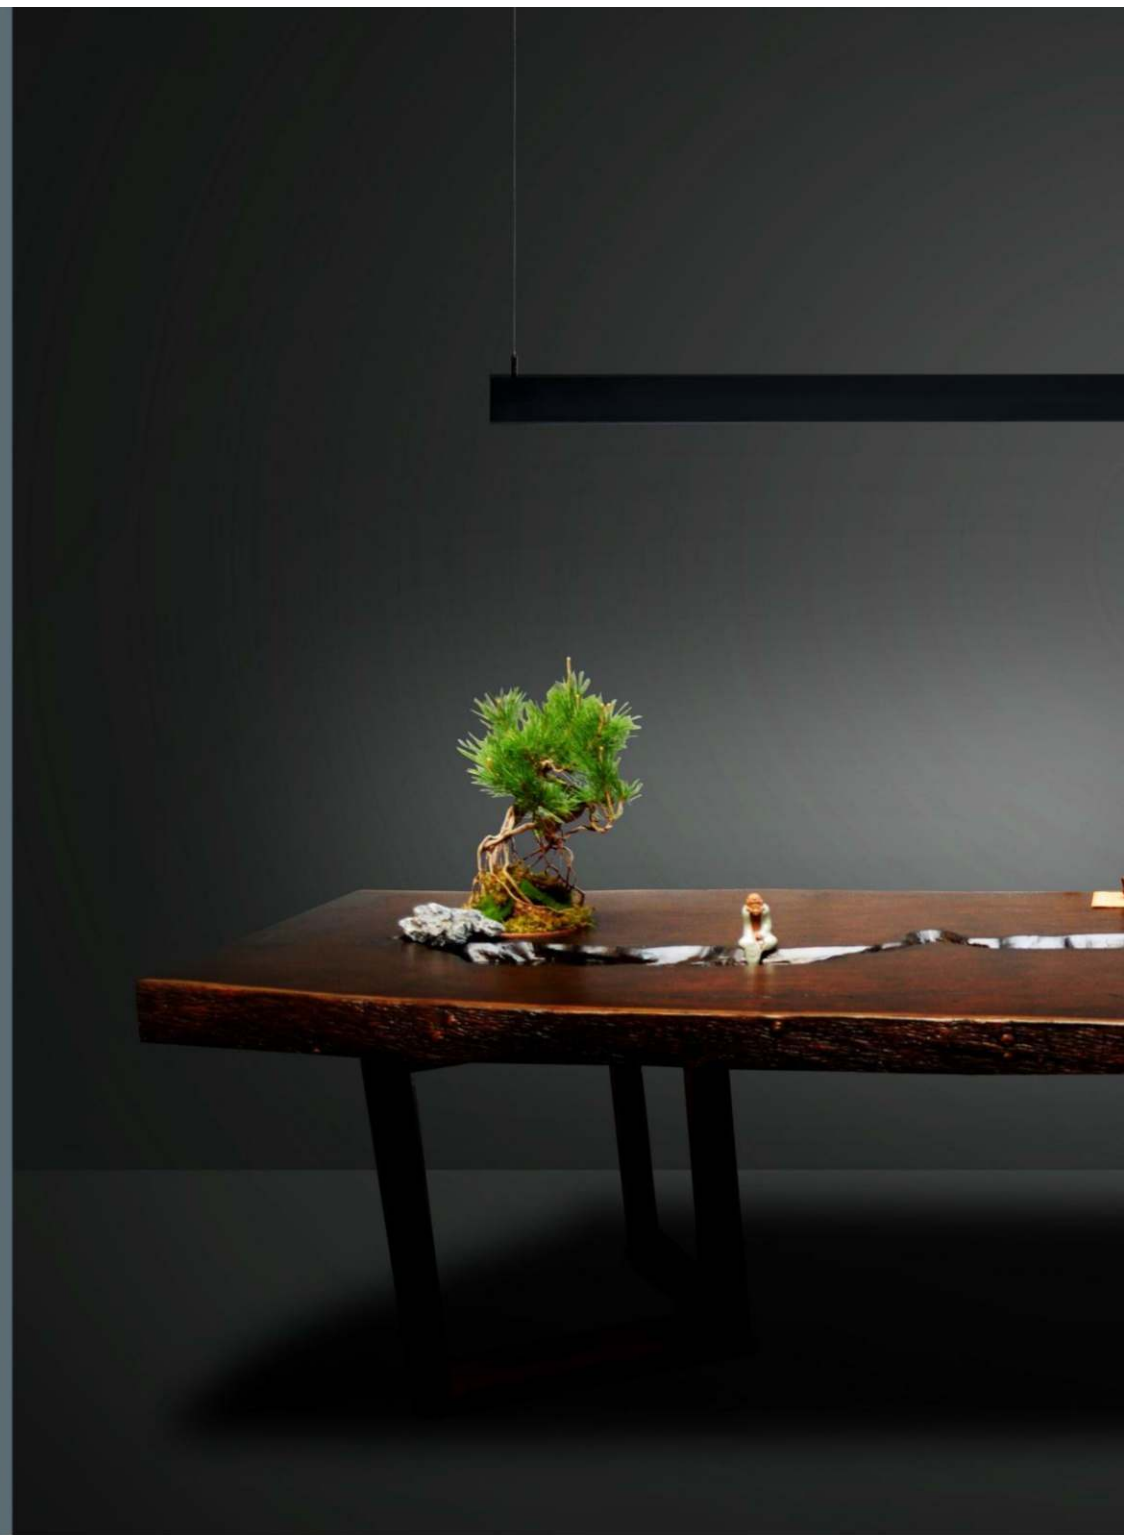




LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



CO PLANE ISOLUX DIAGRAM (UNIT:lx)

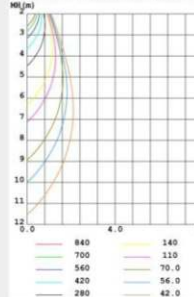

# 2560

Narrow Mierl type down light line lights

## Slow start light intelligent eye protection

— UGR < 16 —

- Product model: F3580
- Product specifications: 1150\*25\*60 (mm)  
2300\*25\*60 (mm)
- Color temperature: 3000K/4000K/5700K CRI>95 UGR<16
- Color: Sand black Sand white/other colors can be customized
- Input voltage: 220V with slow start function
- Installation: Suspended (can be equipped with a ceiling plate)

## Product parameters

Customizable: 0-10 DALI thyristor Zigbee and other intelligent dimming control



### F2560-L14

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*25*60	36W	75	2710	<16




### F2560-PC

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*25*60	36W	85	2890	<22



### F2560-AP3

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*25*60	36W	80	2670	<22




### F2790-L6-3

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1150*25*60	36W	80	2670	<22

Indoor anti-glare hard light strip

2122 2138

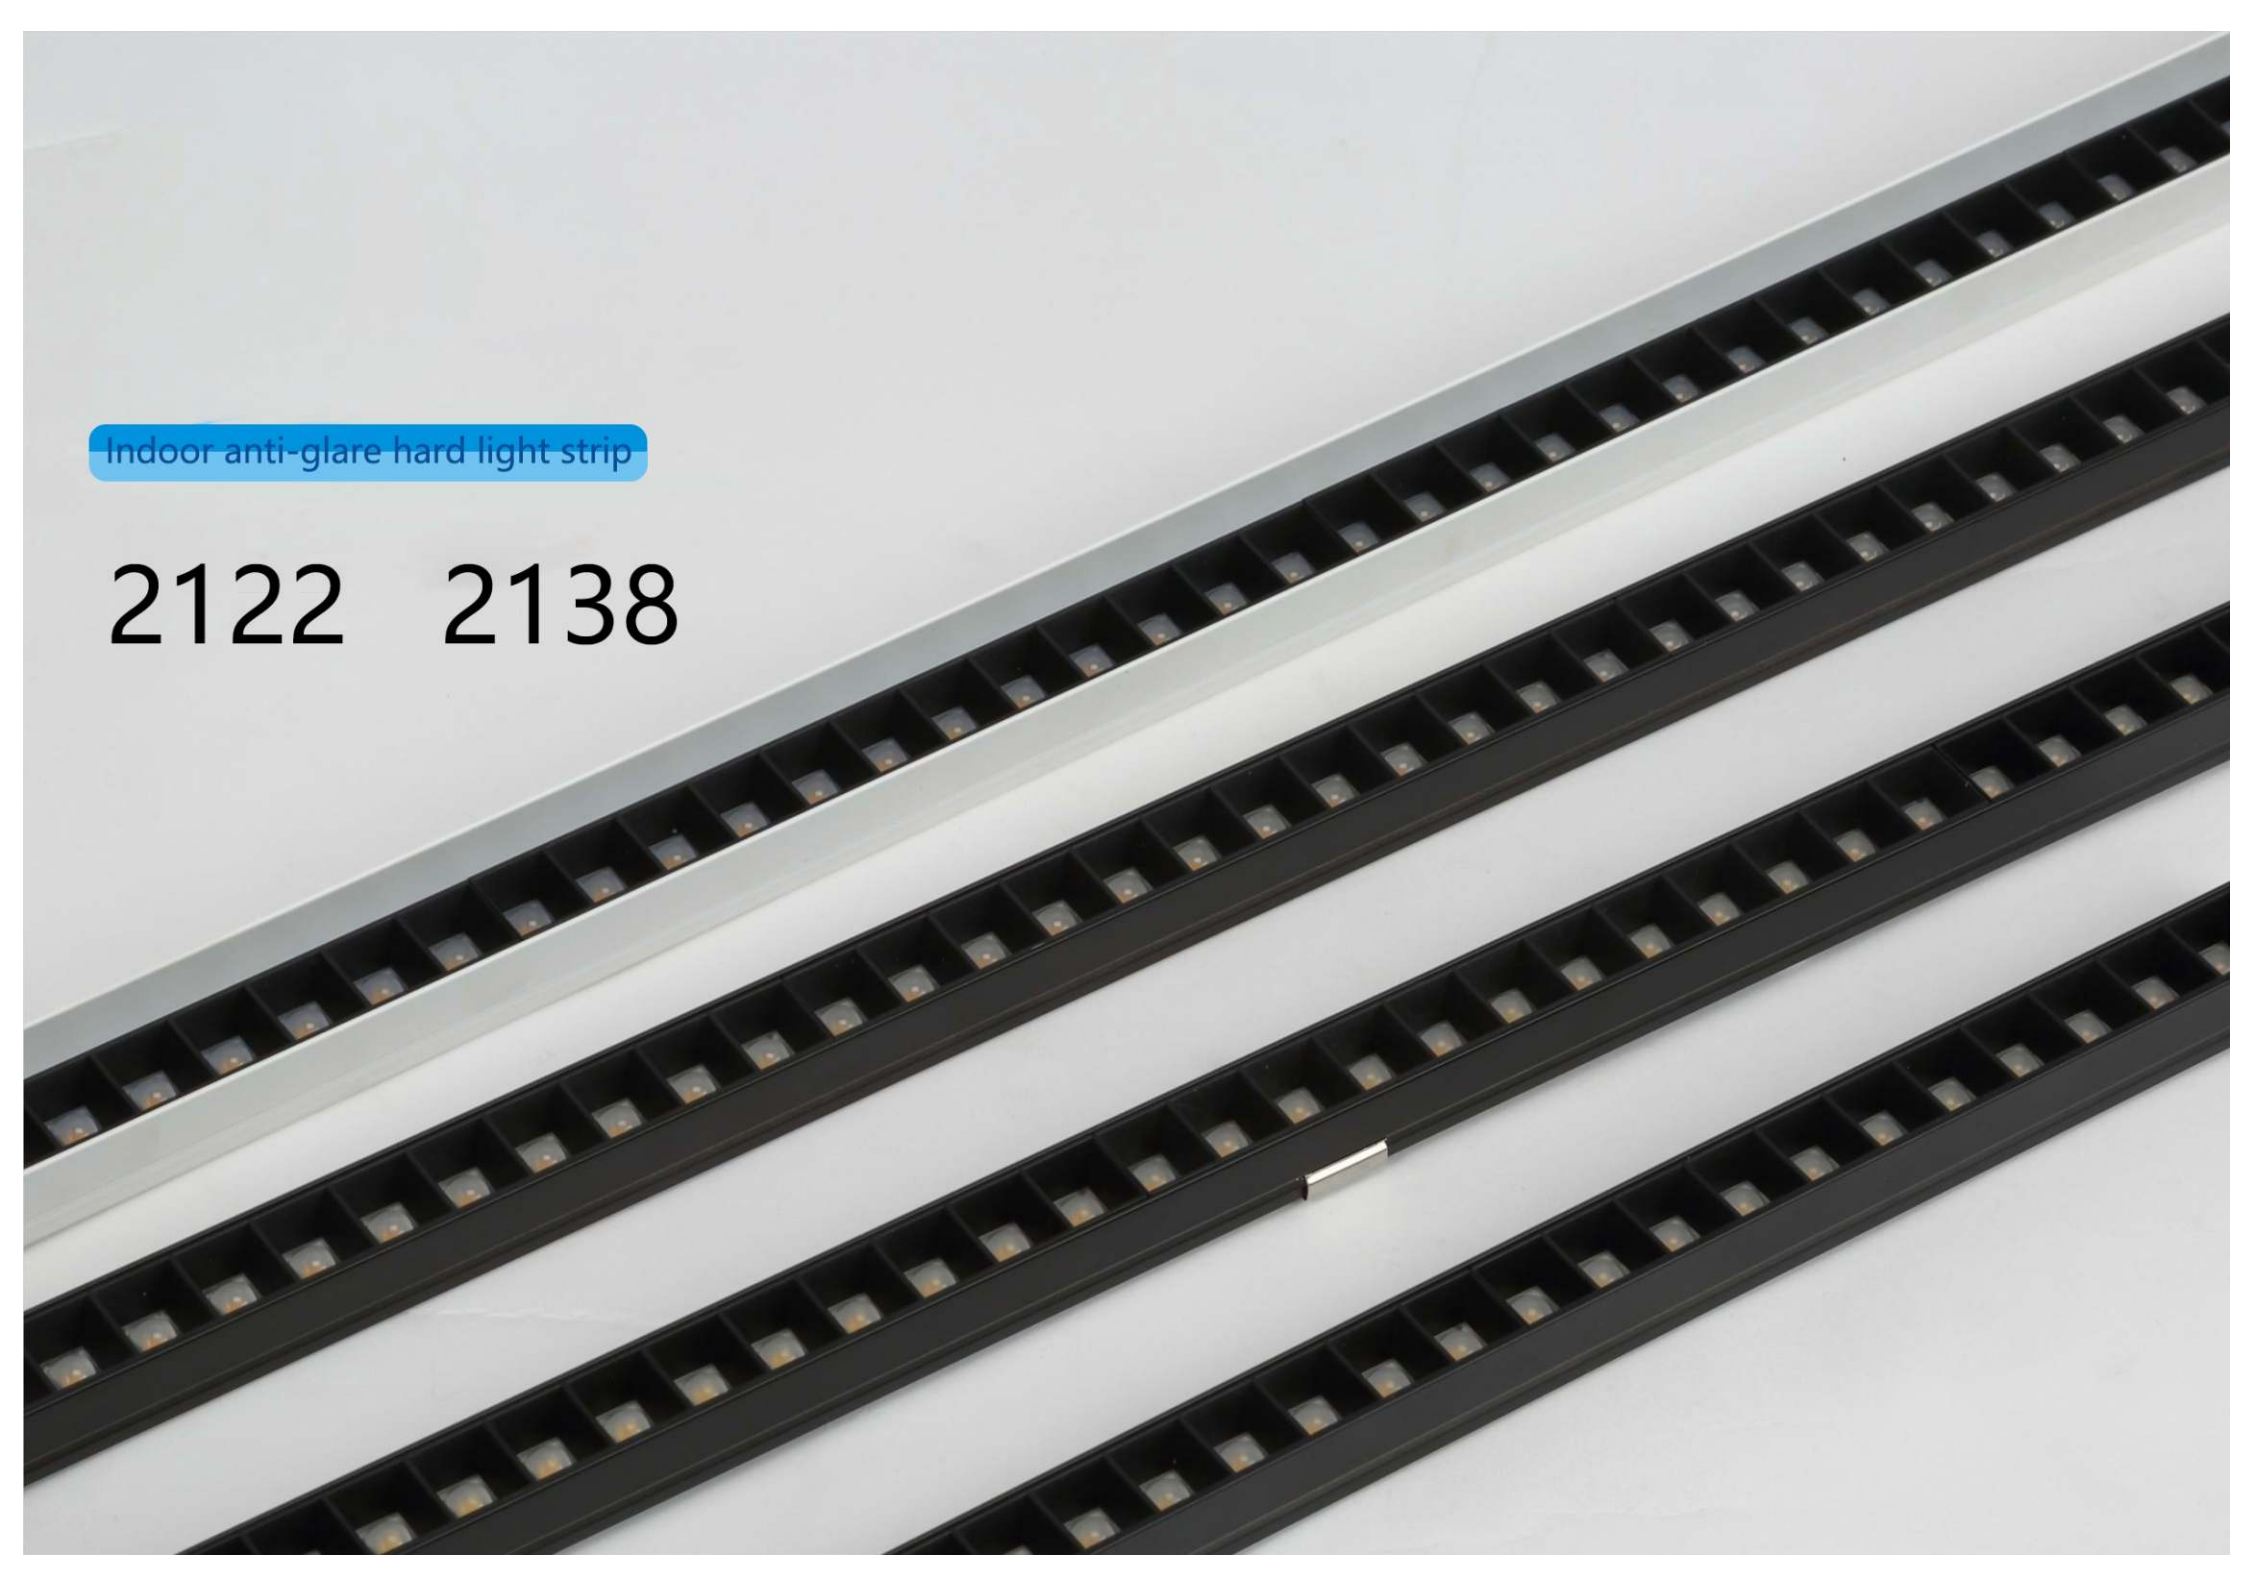



# 2122

Indoor anti-glare hard light strip

Illuminating wall painting  
aisle lighting

dark groove wall washing  
easy to install and practical


Three ways to use

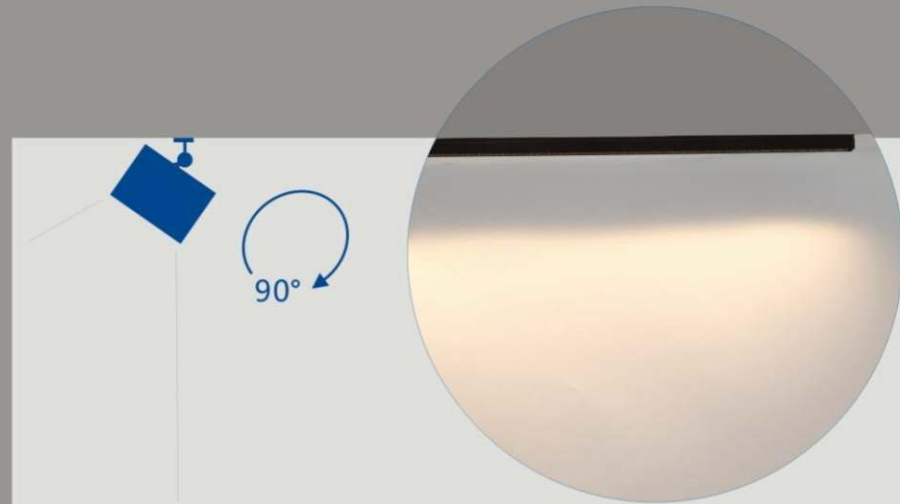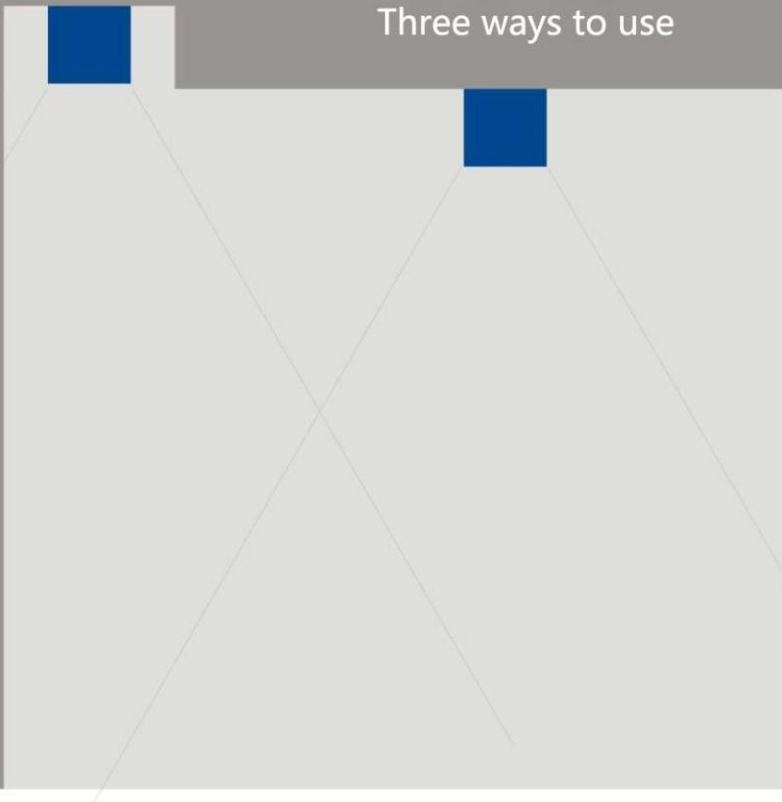



# 2122

## Indoor anti-glare hard light strip

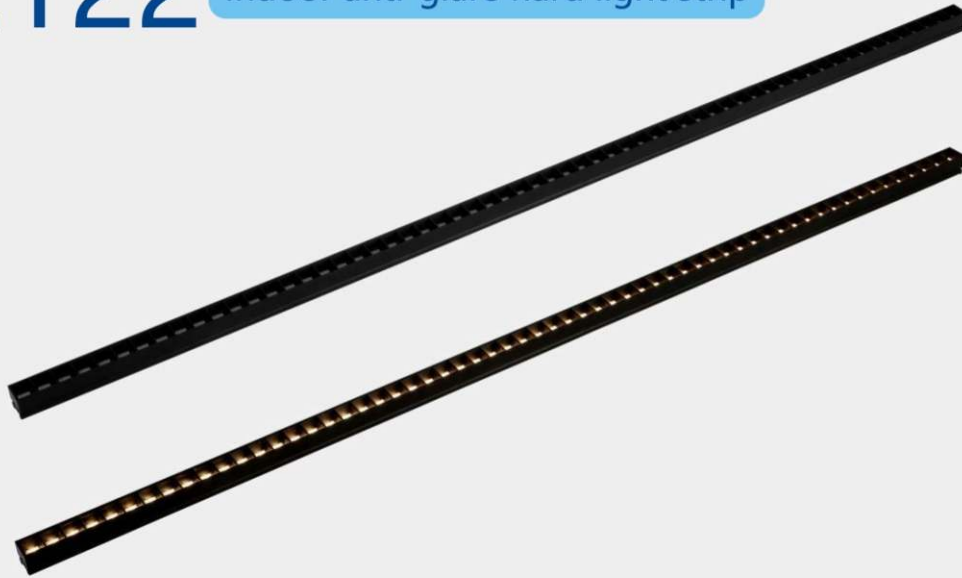

Illuminating wall paintings, aisle lighting, dark groove wall washing, easy to install and practical



### Product information

Product model: F2122  
 Product specifications: 1016\*21\*22 (mm)  
 608\*21\*22 (mm)  
 406\*21\*22 (mm)  
 Color temperature: 3000K/4000K CRI>95 UGR<18  
 Color: Black  
 Input voltage: 24V (constant current power supply optional)  
 Installation: Ceiling installation/swinging ceiling installation

### Product parameters

#### F2122-1016-24V-85D

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1016*21*22	20W	85.3	1760	<18

#### F2122-608-24V-85D


Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
608*21*22	12W	85.3	960	<18

#### F2122-406-24V-85D

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
406*21*22	5W	85.3	420	<18

### Splicing combination



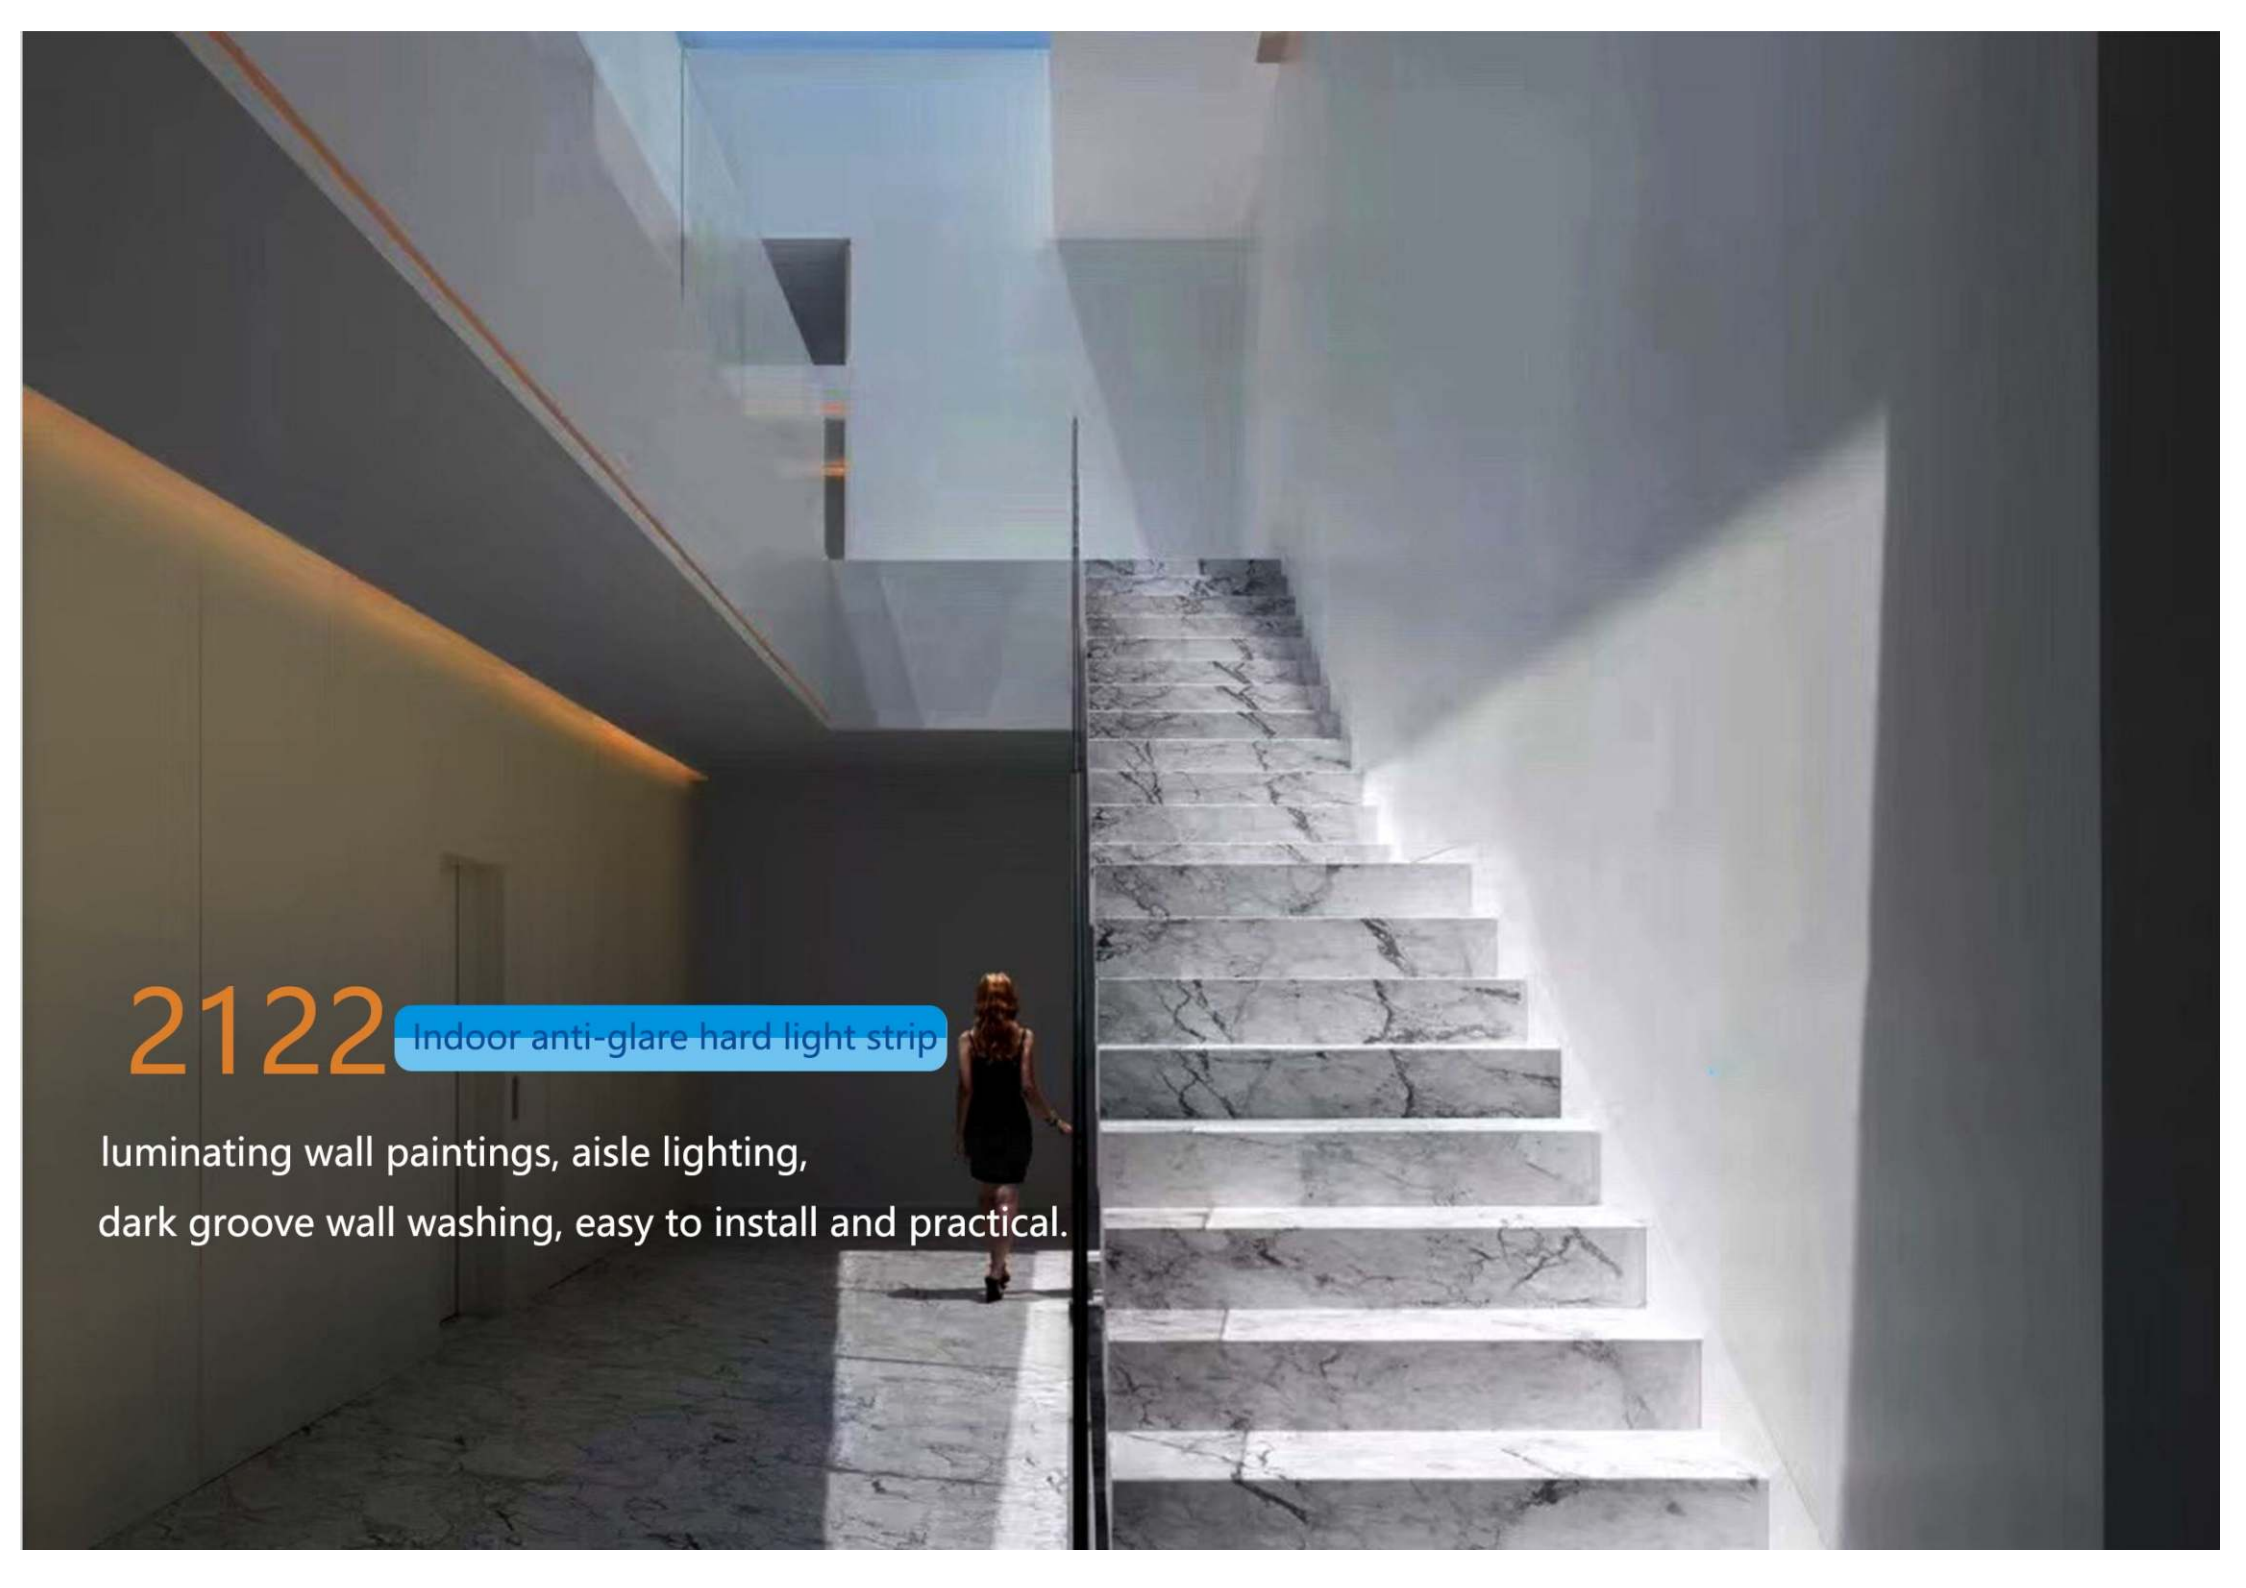

# 2122

Indoor anti-glare hard light strip

luminating wall paintings, aisle lighting,  
dark groove wall washing, easy to install and practical.

# 2138 Indoor anti-glare hard light strip

## Exposure baffle type

Product model: F2138  
Product specifications: 1016\*21\*38(mm)  
608\*21\*38(mm)  
406\*21\*38(mm)  
Color temperature: 3000K/4000K CRI>95 UGR<18  
Color: black  
Input voltage: 24V (constant current power supply mode optional)  
Installation: ceiling installation/swinging ceiling installation

### Product parameters

#### F2138-1016-24V-85D

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1016*21*38	20W	85.3	1760	<18

#### F2138-608-24V-85D


Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
608*21*38	12W	85.3	960	<18

#### F2138-406-24V-85D

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
406*21*38	5W	85.3	420	<18



### Splicing combination

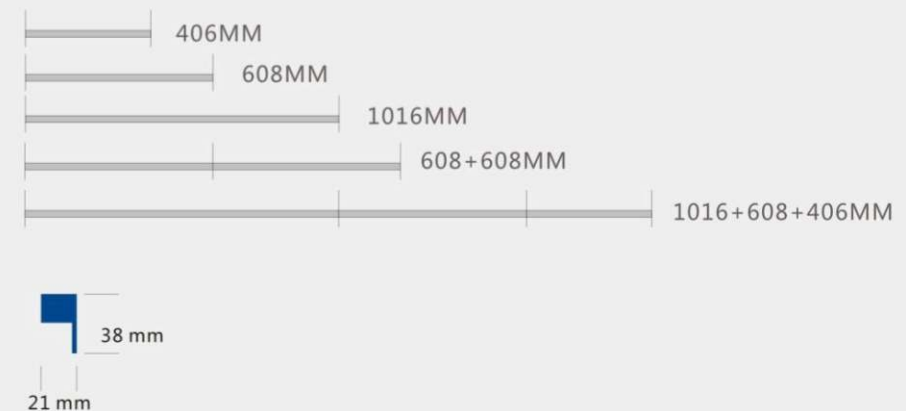

A modern, two-story building with a glass facade is shown at dusk. The building's interior lights are on, and the glass reflects the sky. A swimming pool is in the foreground, and a person is walking on the patio. The sky is blue with some clouds.

Indoor anti-glare hard light strip

2122 2138

**The following is a embedded installation line light**



# 5635

Embedded installation

Using LUMILEDS 2835 high brightness light source  
— UGR<19 —

Latest style anti-glare grille  
PC floodlight type seamless splicing 25M/roll




# 5635

## Embedded installation

Using LUMILEDS 2835 high brightness light source

— UGR<19 —

Latest style anti-glare grille

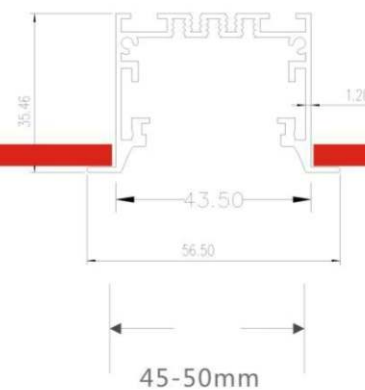

### Slotting

# 5635

## Embedded installation


Product model: F5635  
Product specifications: 1200\*56\*35 (mm)  
2400\*56\*35 (mm)

Color temperature: 3000K/4000K/5000K/5700K CRI>90  
Color: Sand black Sand white / other colors can be customized  
Input voltage: 220V  
Installation: hanging (ceiling plate can be equipped separately)



### Product parameters

Customizable: 0-10 DALI thyristor Zigbee and other intelligent dimming control



#### F5635-PC

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	36W	85	3060	<22



#### F5635-L9

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	36W	75	2710	<19




#### F5635-L4

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	20W	75	1490	<16



#### F5635-AP2

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	36W	75	2750	<22



#### F5635-AP2-1

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	25W	75	1890	<22



#### F5635-L6

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*56*35	25W	75	1890	<19






6533

Embedded installation

Using LUMILEDS 2835 high brightness light source  
— UGR<19 —

Latest style anti-glare grille

PC floodlight type seamless splicing 25M/roll

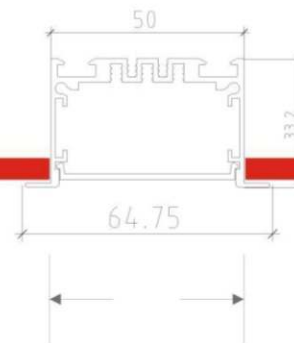

50-55mm

Slotting

# 6533

## Embedded installation


Product model: F6533  
Product specifications: 1200\*65\*33 (mm)  
2400\*65\*33 (mm)

Color temperature: 3000K/4000K/5000K/5700K CRI > 90  
Color: Sand black Sand white / other colors can be customized  
Input voltage: 220V  
Installation: hanging (ceiling plate can be equipped separately)



### Product parameters

Customizable: 0-10 DALI thyristor Zigbee and other intelligent dimming control




#### F6533-PC Floodlight

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	36W	85	2890	<22



#### F6533-L8 Anti-glare grille spotlight

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	36W	75	2310	<19




#### F6533-L4 Anti-glare grille spotlight

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	20W	75	1500	<16




#### F6533-P8 Polarized spotlight

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	40W	45	1650	<22



#### F6533-P4 Polarized spotlight

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	20W	45	900	<19



#### F6533-AT2 Anti-glare grille spotlight + three-wire (two-wire) track strip

Size(mm)	POWER(W)	Efficacy(lm/W)	Luminous Flux(lm)	UGR
1200*65*33	20W	75	1450	<19



6533


Embedded installation

Using LUMILEDS 2835 high brightness light source

UGR<19

Latest style anti-glare grille


PC floodlight type seamless splicing 25M/roll

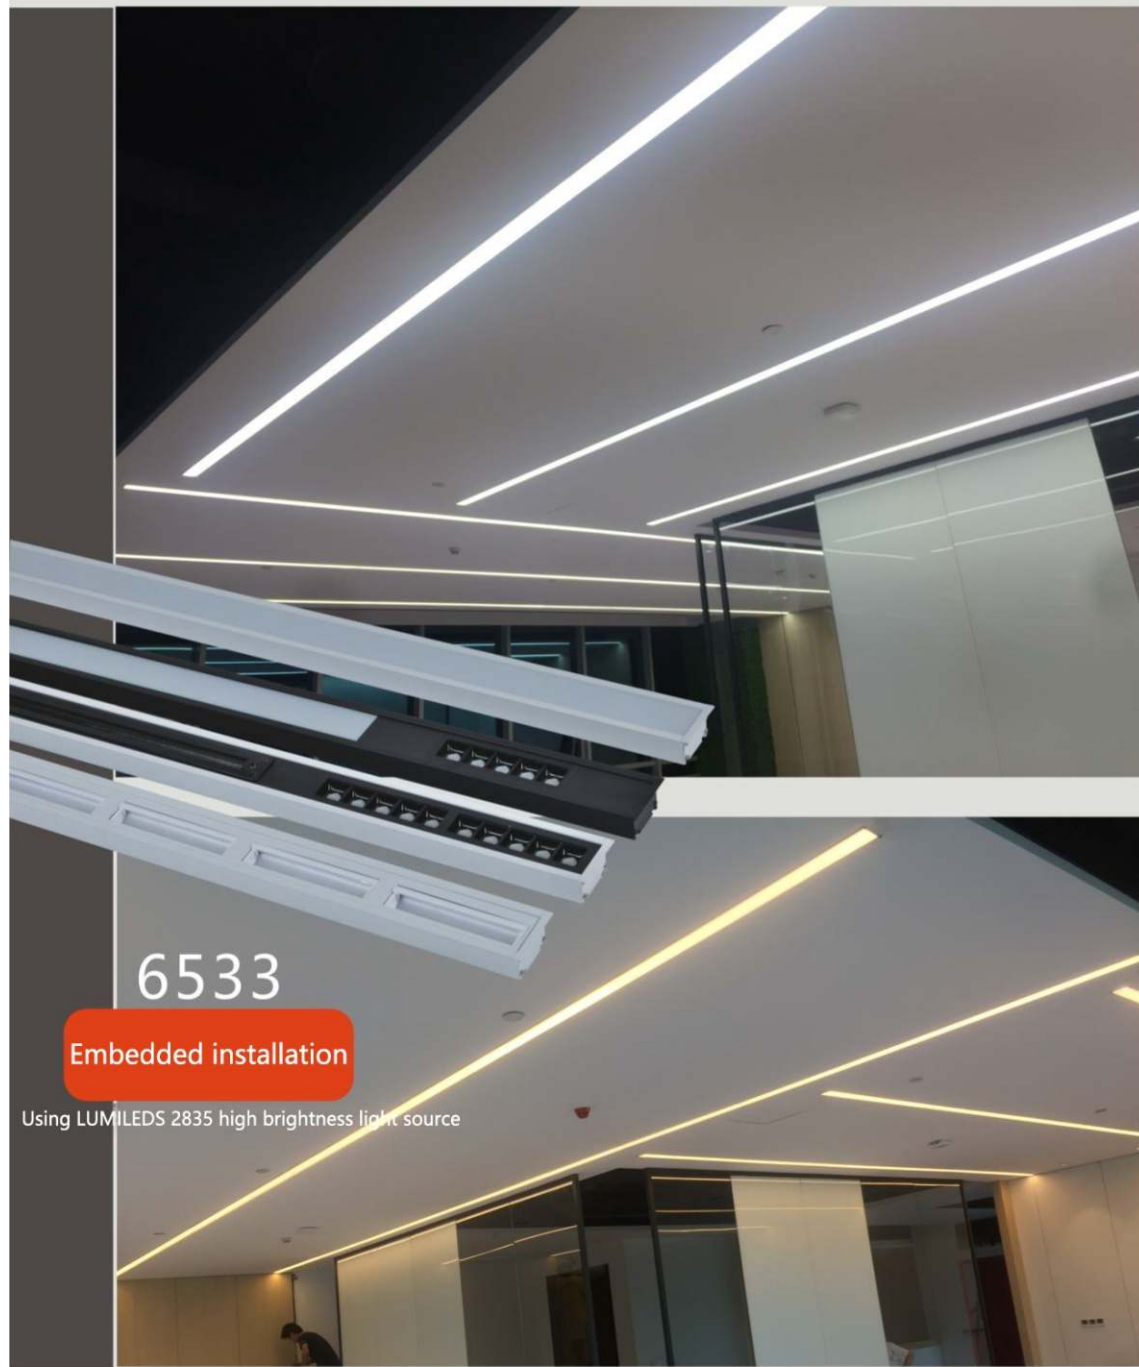

6533

Embedded installation

Using LUMILEDS 2835 high brightness light source

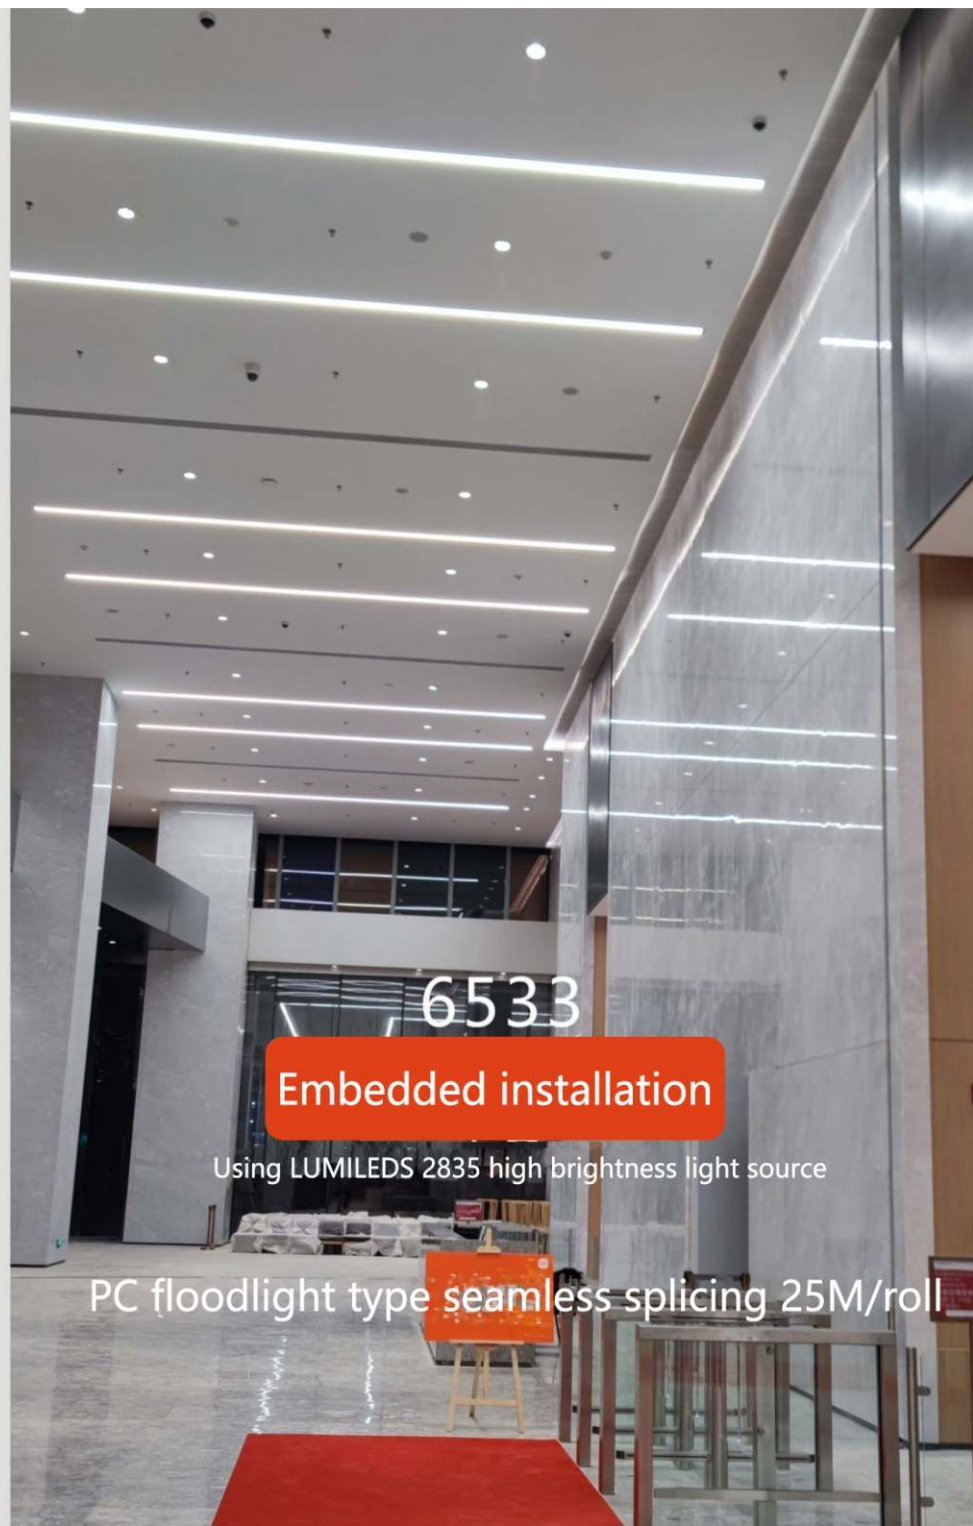

6533

Embedded installation

Using LUMILEDS 2835 high brightness light source

PC floodlight type seamless splicing 25M/roll